

# Investigation of 2-butoxyethanol as biodiesel additive on fuel property and combustion characteristics of two neat biodiesels

Masera, Kemal; Hossain, Abul; Davies, Philip; Doudin, Khalid

*License:*

Creative Commons: Attribution-NonCommercial-NoDerivs (CC BY-NC-ND)

*Document Version*

Peer reviewed version

*Citation for published version (Harvard):*

Masera, K, Hossain, A, Davies, P & Doudin, K 2020, 'Investigation of 2-butoxyethanol as biodiesel additive on fuel property and combustion characteristics of two neat biodiesels', *Renewable Energy*.

[Link to publication on Research at Birmingham portal](#)

## General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

## Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact [UBIRA@lists.bham.ac.uk](mailto:UBIRA@lists.bham.ac.uk) providing details and we will remove access to the work immediately and investigate.

# Investigation of 2-butoxyethanol as biodiesel additive on fuel property and combustion characteristics of two neat biodiesels

Kemal Masera<sup>1</sup>, Abul K. Hossain<sup>1\*</sup>, Philip A. Davies<sup>3</sup>, Khalid Doudin<sup>2</sup>

<sup>1</sup>Mechanical Engineering and Design, <sup>2</sup>Chemical Engineering and Applied Chemistry  
School of Engineering and Applied Science,  
Aston University, Birmingham B4 7ET, UK.

<sup>3</sup>School of Engineering, University of Birmingham, Birmingham B15 2TT, UK.

\*Corresponding author. E-mail address: [a.k.hossain@aston.ac.uk](mailto:a.k.hossain@aston.ac.uk) (Abul K. Hossain).

## Abstract

Neat biodiesels are not preferred for use in the compression ignition (CI) engines due to their high viscosities and related operational difficulties. This study investigated the fuel properties and combustion characteristics when 2-butoxyethanol additive was mixed separately with waste cooking oil biodiesel (W100) and rapeseed oil biodiesel (R100). Compared to neat biodiesels, the viscosities (at 40 °C) of the W100 and R100 were reduced by 12.5% and 9.8% respectively, when they were blended separately with 15% 2-butoxyethanol. Four different samples such as W100, mixture of 85% W100 and 15% 2-Butoxyethanol (W85), R100, mixture of 85 % R100 and 15% 2-Butoxyethanol (R85) were tested in a multi-cylinder CI engine. The thermal efficiency of the W85 fuel was higher than fossil diesel by approximately 3.7%. Total combustion duration of the biodiesel-additive blends were shorter than neat biodiesels and fossil diesel. Biodiesel-additive blends provided approximately 6% higher in-cylinder peak pressures. At full load, W85 fuel gave up to 5.4% reduced NO<sub>x</sub> emissions than neat biodiesel. The CO, HC and smoke emissions were decreased by up to 36%, 100% and 79% respectively. The study concluded that 2-butoxyethanol could effectively be used as biodiesel additive to improve fuel property; and to achieve better combustion and reduced pollution.

*Keywords:* biodiesel; CI engine; combustion; emission; fuel additive; performance.

## Table of contents

Abstract.....	1
1. Introduction .....	2
2. Materials and methods.....	5
2.1 Biodiesels production .....	5
2.2 Alcohol blends preparation and fuel characterisation.....	5
2.2.2 Gas chromatography and mass spectrum analyses .....	6
2.3 Engine test rig and instrument .....	6
2.4 Error analysis.....	8
3. Results and discussion .....	8
3.1 Fuel properties .....	8
3.2 Engine performance.....	10
3.3 Combustion characteristics.....	11
3.4 Exhaust gas emissions .....	15
3.5 Economic feasibility analysis .....	18
4. Conclusion.....	19
Acknowledgments .....	19
References .....	19

## 50 Abbreviations

51	aTDC	After top dead centre
52	BSFC	Brake specific fuel consumption
53	bTDC	Before top dead centre
54	BTE	Brake thermal efficiency
55	CA	Crank angle
56	CHO	Carbon, hydrogen and oxygen
57	CI	Compression ignition
58	DEF	Diesel exhaust fluid
59	DPF	Diesel particulate filter
60	EGR	Exhaust gas recirculation
61	FAME	Fatty acid methyl ester
62	FD	Fossil diesel
63	GCMS	Gas chromatography and mass spectrum
64	HVO	Hydrotreated vegetable oil
65	IC	Internal combustion
66	KOH	Potassium hydroxide
67	LHV	Lower heating value
68	OEM	Original equipment manufacturer
69	PAHs	Polycyclic aromatic hydrocarbons
70	PCDD/Fs	Polychlorinated dibenzo-p-dioxins and dibenzofurans
71	PM	Particulate matter
72	RO	Rapeseed oil
73	R100	Rapeseed oil biodiesel
74	R85	Rapeseed oil biodiesel 85% by volume and 2-Butoxyethanol 15% by volume
75	SCR	Selective catalytic reduction
76	ULSD	Ultra low sulphur diesel
77	WCO	Waste cooking oil
78	W100	Waste cooking oil biodiesel
79	W85	Waste cooking oil biodiesel 85% by volume and 2-Butoxyethanol 15% by volume

80  
81  
82  
83

## 84 1. Introduction

85

86 Due to high thermal efficiency and low weight-to-power ratio diesel engines are still popular and widely used in  
87 many sectors. However, they consume huge quantities of fossil diesel fuel and emit harmful gas and soot  
88 emissions which cause damage to the human health and environment [1–3]. The carbon soot from diesel engine  
89 constitutes 73-83% of particulate matter (PM) [4]. The other pollutants in soot are: soluble organic fractions, ash  
90 content, trace metals, sulphur compounds, and other substances like polycyclic aromatic hydrocarbons (PAHs)  
91 [4,5]. Furthermore, polychlorinated dibenzo-p-dioxins and dibenzofurans (PCDD/Fs) are reported as pollutant  
92 gas emissions from diesel engine [6,7]. The risk of respiratory, cardiovascular and lung cancer diseases are  
93 enhanced when a human is exposed to PM emission. Selective catalytic reduction (SCR) and diesel particulate  
94 filter (DPF) components are normally used to reduce the tail pipe NO<sub>x</sub> and Particulate Matter (PM) emissions  
95 respectively [8–10]. Other techniques such as exhaust gas recirculation (EGR), dual fuelling, water injection and  
96 retardation of injection timing are also used to reduce the NO<sub>x</sub> emission. However, adoption of these techniques  
97 requires modifications on the engine component; hence, their applications are limited due to the additional  
98 efforts and expenses involved.

99 Renewable alternative fuels could potentially be used in the internal combustion (IC) engines to replace fossil  
100 based fuels and to reduce harmful gas emissions [11,12]. Biodiesels are considered as one of the most promising  
101 alternative to fossil diesel due to better physico-chemical properties and life-cycle emission mitigation potential  
102 [13,14]. Literature reported that in China, replacing petroleum diesel with waste cooking oil biodiesel would  
103 decrease life cycle greenhouse gas emissions by up to 5.5x10<sup>6</sup> tons of CO<sub>2</sub> equivalent [15]. Although, literature  
104 agreed that biodiesel fuel significantly reduced the PM, HC, CO and CO<sub>2</sub> emissions, most researchers reported  
105 that the use of 100% biodiesel fuels (B100) in the unmodified diesel engines gave higher NO<sub>x</sub> emissions than

106 those obtained for pure fossil diesel [16,17]. This phenomenon is also known as ‘biodiesel NO<sub>x</sub> penalty’ in the  
107 literature [18]. Other technical issues associated with the neat biodiesel (B100) use are: (i) starting the engine in  
108 cold weather, (ii) flow of biodiesel to injector due to higher viscosity, (iii) sticking and clogging of fuel injector  
109 holes, fuel filters, and inlet/exhaust vales, and (iv) compatibility of fuel supply pipe materials with the biodiesel  
110 [19–21]. To address these problems, Silva et al. investigated the effects of various alcohols used in  
111 transesterification (biodiesel production) process on the fuel properties of Macauba oil biodiesel [22]. They  
112 found that ethyl ester gave better cold filter plugging point property than methyl or isobutyl esters [22]. Another  
113 approach is to blend biodiesel with another fuel. Literature reported that blending biodiesel with fossil fuels or  
114 alcohols (and/or other additives) improved engine performance and reduced emissions [16,23]. Furthermore,  
115 researchers found that blending neat biodiesel with additives gave lower NO<sub>x</sub> and PM emissions than neat  
116 biodiesel (B100) operation [24,25]. The most common alcohols used as biodiesel additives are ethanol and  
117 methanol [26]. Datta and Mandal reported that blending palm stearin biodiesel with 15% methanol (or ethanol)  
118 decreased the peak in-cylinder pressure with respect to the neat biodiesel [20]. They found that the NO<sub>x</sub>  
119 emissions were reduced by 19% and 30% due to methanol and ethanol addition respectively [20]. The smoke  
120 opacity was decreased dramatically when the biodiesel-alcohol blend was used [20]. In another study, the  
121 concentration of PM and PAHs emissions were investigated when 1-3% acetone and 1% isopropyl were added  
122 in the waste cooking oil biodiesel [4]. The authors reported that the use of both additives helped to reduce the  
123 PAH and PM emission by 24.1% and 53.2% respectively. Vedaraman et al. reported that NO<sub>x</sub> emissions were  
124 decreased when ethanol, methanol, diethyl ether and distilled water was added separately into fossil diesel-palm  
125 oil biodiesel blend [27]. Addition of methanol and water reduced the NO<sub>x</sub> emission by up to 2.7% and 7%  
126 respectively [27]. However, they found out that the HC emission was increased with the distilled water addition  
127 [27].

128 On the other hand, increase in the NO<sub>x</sub> emissions were also observed by the researchers when additives such as  
129 methanol, ethanol and butanol were added to neat biodiesel or diesel-biodiesel blends [28,29]. Yilmaz compared  
130 the effects of ethanol and methanol addition in diesel-biodiesel blends in a two cylinder direct injection type  
131 Kubota diesel generator set [28]. Blends containing 40% biodiesel-40% diesel-20% alcohol and 45% biodiesel-  
132 45% diesel-10% alcohol, and neat fossil diesel were tested. The author reported that compared to fossil diesel,  
133 the brake specific fuel consumption (BSFC) of ethanol and methanol blends were increased by up to 28.6% and  
134 58.3% respectively. The author found that the methanol blends did not help to decrease the NO<sub>x</sub> emissions.  
135 Whereas, ethanol blends reduced the NO<sub>x</sub> emissions by approximately 20% at mid-range loads [28]. Another  
136 study conducted by Tosun et al. investigated the influences adding ethanol, methanol and butanol separately into  
137 peanut oil biodiesel by testing these blends in a multi-cylinder direct injection type diesel engine [29]. They  
138 reported that 20% blends of methanol, ethanol and butanol with peanut oil biodiesel enhanced the engine torque  
139 output by about 1.2%, 3.4% and 6.1% respectively as compared to neat biodiesel operation. The CO emissions  
140 of methanol, ethanol and butanol blends were decreased by 4.8%, 1.8% and 9.1% respectively. They observed  
141 that the NO<sub>x</sub> emissions were increased by 13.8%, 4.1% and 17.4% for 20% blends of methanol, ethanol and  
142 butanol respectively [29]. Yasin et al. investigated the effects of 5% methanol addition on B20 blend with diesel  
143 [25]. Methanol was mixed with the biodiesel-diesel blend using an ultrasonic agitator operated at 40 kHz  
144 frequency. They found that the brake power for B20M5 fuel was decreased by approximately 7% and 10% than  
145 B20 and neat diesel fuels respectively. The BSCF of the engine was increased by about 4-6% [25]. A reduction  
146 of approximately 17-18% in CO and CO<sub>2</sub> emissions, and an increase of 13% in NO<sub>x</sub> emission was reported  
147 when the engine was fuelled with B20 M5 fuel [25]. In another study, Yilmaz investigated the effects of air  
148 intake temperature when the engine was fuelled with 85% biodiesel-15% alcohol blends [26]. The author  
149 reported that the CO and HC emissions were reduced by increasing the air intake temperatures and with the  
150 increasing percentage of alcohol additives [26]. Sarikoc et al. tested butanol additive at 5% and 10% blend ratios  
151 with 80% diesel - 20% waste cooking oil biodiesel blend [30]. They reported that the CO, CO<sub>2</sub>, smoke opacity  
152 and NO<sub>x</sub> emissions were reduced by approximately 21%, 11%, 19% and 3% with 10% butanol addition [30].  
153 However, HC emission was increased by approximately 32% as a result of worsened combustion efficiency  
154 [30]. They also reported 16.17% reduction on thermal efficiency of the engine due to low LHV and cetane  
155 number of the butanol [30]. The effect of n-butanol additive was also investigated along with the engine  
156 modifications such as EGR, piston geometry, injection timing and injection pressure [31]. The authors found out  
157 that toroidal piston was most suitable for n-butanol/diesel blends than biodiesel and diesel [31]. Zhang et al.  
158 investigated the influence of n-butanol, n-octane and 2-ethylhexanol alcohols as biodiesel additive in a CI  
159 engine using a wave-shaped piston bowl geometry [32]. The alcohols were blended separately either with  
160 rapeseed biodiesel or hydrotreated vegetable oil (HVO) at different volume fractions [32]. They reported that

161 the CO and soot emissions were reduced when compared to fossil diesel [32]. The NO<sub>x</sub> emission was increased,  
 162 the least increase of NO<sub>x</sub> emission was found to be 10% than fossil diesel for 2EH40H60 blend (40% 2-  
 163 ethylhexanol and 60% HVO) at full load condition [32]. The 30% n-butanol and 70% HVO blend gave optimum  
 164 engine performance when wave-shaped piston bowl geometry was used [32]. Radheshyam et al. assessed the  
 165 impact of using 1-pentanol as fossil diesel additive at volume fractions of 5%, 10%, 20%, 30% and 40% [33].  
 166 They reported that compared to pure fossil diesel operation and at high loads, 40% 1-pentanol blend gave 8%  
 167 lower NO<sub>x</sub> emission; however, the CO and HC emissions were increased from 0.01 % (vol.) to 0.04 % (vol.),  
 168 and from 2.5 ppm to 11.5 ppm [33].





169 The above studies demonstrated that in general, blending biodiesel with alcohols improved engine performance  
 170 characteristics. However, in the case of emission characteristics, no specific conclusions could be reached on  
 171 whether adding alcohol helped to decrease the harmful gas emissions or not. So far the effects of ethanol,  
 172 methanol and butanol on biodiesel fuelled engine operation were found in the literature. In this study, a new  
 173 oxygenated additive '2-Butoxyethanol' will be used to assess the performance and emission characteristics of  
 174 the engine operated with biodiesel-butoxyethanol blends. The '2-butoxyethanol' is an ether compound with  
 175 ethanol branch containing additional oxygen molecule (Table 1). It is not a naturally occurring compound but  
 176 obtained via different techniques in the laboratory environment like ethoxilation and etherification of butanol  
 177 [34,35] Additional oxygen content in 2-butoxyethanol would further help to combust the biodiesel fuels more  
 178 efficiently. Furthermore, the flash point of the 2-butoxyethanol is close to fossil diesel and higher than other  
 179 alcohols used previously by the researchers (Table 1). In addition, 2-butoxyethanol have better surfactant  
 180 properties which may help to reduce the corrosion rate of a biodiesel fuel on various engine components [34].  
 181 Due to these promising fuel properties, investigation of the 2-butoxyethanol as a biodiesel additive will be  
 182 carried out in this study. It is important to note that no such study was found in the literature. Two different  
 183 biodiesels produced from waste cooking oil (WCO) and rapeseed oil (RO) will be used in this study. Biodiesels  
 184 will be blended separately with 2-butoxyethanol. A 3-cylinder diesel engine will be used to test the fuels.  
 185 BOSCH emission analyser and Kistler combustion analysis kit 'KiBox' will be used for measurements of  
 186 emission gases and combustion parameters. The main objectives of the study are: (i) Production of waste  
 187 cooking oil and rape seed oil biodiesels in the laboratory, (ii) Preparation of 2-Butoxyethanol - biodiesel blends  
 188 and investigation of the fuel properties, (iii) To study the performance, combustion and emission characteristics  
 189 of the multi-cylinder engine operated with 2-Butoxyethanol-biodiesel blends, and (iv) Comparison of the  
 190 biodiesel-additive fuelled engine characteristics with neat biodiesels and neat fossil diesel operation. Physical  
 191 and chemical properties of the biodiesels, biodiesel blends and fossil diesel fuel samples will be carried out  
 192 according to international standards.

193

194

195 **Table 1**

196 Properties of common alcohols and 2-butoxyethanol.

	Methanol [36]	Ethanol [37]	Butanol [38]	2-butoxyethanol [39,40]
Structure				
Linear formula	CH <sub>3</sub> OH	CH <sub>3</sub> CH <sub>2</sub> OH	CH <sub>3</sub> (CH <sub>2</sub> ) <sub>3</sub> OH	CH <sub>3</sub> (CH <sub>2</sub> ) <sub>3</sub> OCH <sub>2</sub> CH <sub>2</sub> OH
Molecular weight (g/mol)	32.042	46.069	74.123	118.176
Heat of vaporisation (kJ/mol at 25 °C)	37.34	42.32	52.35	56.59
Miscibility with organic solvents	Yes	Yes	Yes	Yes
Kinematic viscosity (at 25 °C mm <sup>2</sup> /s)	0.69	1.36	3.14	3.15
Density (kg/m <sup>3</sup> )	792	789	810	900
Flash point (°C)	12	17	29	62
Boiling point (°C)	64.7	79	117.6	171
Melting point (°C)	-98	-117	-90	-75

197

198

## 2. Materials and methods

### 2.1 Biodiesels production

Two biodiesels were produced in the laboratory using two different feedstock ie. waste cooking oil and rapeseed oil. Waste cooking oil was collected from a local restaurant in Birmingham and rapeseed oil was procured from a supermarket. The feedstock was first filtered using sock filter, and then transesterified using methanol and potassium hydroxide (KOH) catalyst. Initially, feedstock was heated up to approximately 55°C temperature. Then a mixture of methanol and KOH was introduced into the heated feedstock. Methanol to oil ratio was 1:5 by volume. The amount of KOH required was calculated by titration method. The mixture was stirred mechanically for around 30 minutes and transferred into a separator funnel for phase separation. The mixture was kept in the lab undisturbed for 24 hours, after that glycerol was removed and pure biodiesels were collected. Finally, produced biodiesels were washed by spraying distilled water. The water was removed from the biodiesel by separation technique and the washing was repeated couple of times until a clear colour biodiesel was obtained. Figure 1 shows the reaction schematic of the transesterification process. One (1) mole of triglyceride (feedstock) reacted with three (3) moles of methanol in the presence of KOH catalyst. The product is a mixture of glycerol and fatty acid methyl esters.

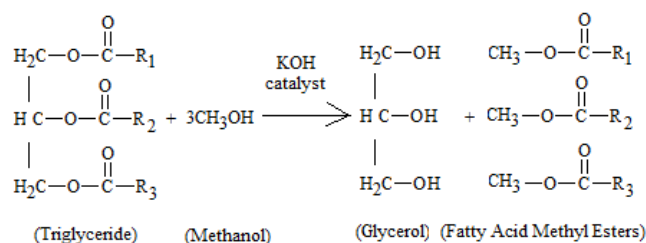


Fig. 1. Transesterification reaction mechanism

### 2.2 Alcohol blends preparation and fuel characterisation

#### 2.2.1 Additive mixing and characterisation

2-Butoxyethanol (99% purity) was purchased from Fisher Scientific (UK) and used as a biodiesel additive in the current study. The amount of additive added to biodiesel was 15% (by volume); five different fuel samples were prepared: Ultra-low Sulphur Diesel (ULSD) as a reference fuel, neat waste cooking oil biodiesel (W100), blend of 85% waste cooking oil biodiesel and 15% of 2-butoxyethanol (W85), neat rapeseed oil biodiesel (R100), blend of 85% rapeseed oil biodiesel and 15% of 2-butoxyethanol (R85) (see Figure 2). The 2-butoxyethanol additive was miscible with biodiesels, no phase separation or solid formation was observed. Thus, no surfactant or mechanical stirring was needed. The reference ULSD diesel was purchased from Esso UK which satisfy the BS EN 590 specification [41]. The physical and chemical properties of the fuel samples were measured at the mechanical and chemical engineering laboratories of Aston University (Birmingham, UK). The calorific values were measured by bomb calorimeter (model Parr 6100) having an accuracy of  $\pm 0.1\%$ . Kinematic viscosities were measured (according to ASTM D 445 and ISO 3105 standards) using the Cannon-Fenske viscometer (M100) and thermostatic water bath; the measurement uncertainty was 0.16%. The density was measured by a hydrometer according to ASTM D7544 standard. Stanhope-Seta closed cup flash point tester (model: Setaflash 33000-0) was used to measure the flash point temperatures of the samples with the accuracy of  $\pm 0.5$ .

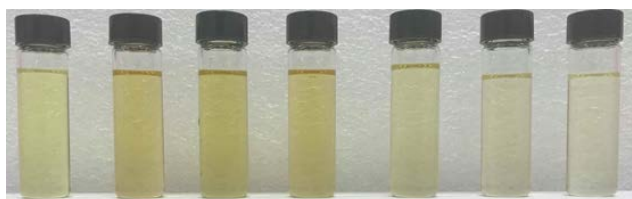


Fig. 2. Fuel samples from left to right: fossil diesel, WCO, W100, W85, rapeseed oil, R100 and R85

## 2.2.2 Gas chromatography and mass spectrum analyses

The fatty acid methyl ester (FAME) contents of the biodiesel were determined by the gas chromatography Thermo Trace 1300 coupled with mass spectrometer (GCMS) equipment. Separation was performed on a capillary column Elite-5MS (30 m × 0.22 mm, 0.25 μm). The carrier gas was Helium with flow rate of 1.25 mL/min. The column temperature was programmed from 100 to 275 °C at the rate of 10 °C/min. Fuel sample of 0.05 g was dissolved in 50 ml of methanol, the mixture was then placed into ultrasonicator for 15 minutes. Then, 0.1 μL of the prepared sample was transferred into test tube and loaded to the GCMS equipment. A split mode was used with the split ratio of 1:10. The temperature of the injector was set at 280 °C. The mass spectrometer was set to scan in the range of 50–600 m/z with electron impact (EI) mode of ionization, the MS transfer line and the ion source temperatures were set at 250 °C and 200 °C, respectively. The Carbon Hydrogen Oxygen (CHO) analysis, iodine value and cetane number of the fuels were estimated from the FAME composition found by GCMS analysis. Mass percentages/fractions of FAME components were multiplied by the relative values found in the literature (Table 2) to estimate the iodine value, cetane number and CHO content (equations 1 and 2).

$$Iodine\ Value_{Fuel} = \sum (Percent\ FAME_i \times Factor\ FAME_i) \quad (1)$$

$$Cetane\ Number_{Fuel} = \sum (Fraction\ FAME_i \times Cetane\ Number\ FAME_i) \quad (2)$$

**Table 2**

Fuel properties of individual FAME compounds.

FAME		Iodine value [42]	Cetane number [43]	Cetane number [44]	Carbon [45]	Hydrogen [45]	Oxygen [45]
Myristic	C14:0	0	66.2	65.4	0.74	0.12	0.1322
Palmitic	C16:0	0	74.3	73.9	0.76	0.13	0.1185
Palmitoleic	C16:1	0.95	51	53.3	0.76	0.12	0.1194
Stearic	C18:0	0	75.6	82.3	0.77	0.13	0.1074
Oleic	C18:1	0.86	56.5	61.7	0.77	0.12	0.1081
Linoleic	C18:2	1.732	38.2	41.1	0.78	0.12	0.1088
Linolenic	C18:3	2.616	22.7	20.5	0.78	0.11	0.1096
Arachidic	C20:0	0	100	90.8	0.77	0.13	0.0982
gadoleic	C20:1	0.785	64.8	70.2	0.78	0.12	0.0988
Behenic	C22:0	0	100	100	0.78	0.13	0.0904
Erucic	C22:1	0.723	76	78.7	0.78	0.13	0.0909

## 2.3 Engine test rig and instrument

In this research, three-cylinder Lister Petter compression ignition engine having an indirect injection system was used. Table 3 shows technical specification of the engine. The engine speed was kept constant at the rated speed of 1500 rpm throughout the experiments. Approximately an hour engine tests were conducted to test each samples ie. W100, W85, R100, R85 and fossil diesel. Engine operating conditions such as air intake system, tail pipe configuration, lubricant, cooling agent, compression ratio, break mean effective pressure etc. were kept identical for each test. Engine performance, combustion and exhaust gas emission parameters were collected at six different engine loads: around 20%, 40%, 60%, 70%, 80%, and 100%. In order to get correct readings, the engine was allowed to run around 20 minutes between fuel changes. The tests procedures followed were: (i) the engine was first started with fossil diesel, (ii) then switched to neat biodiesel, and (iii) then switched to biodiesel-additive blend operation. In addition, the fuel supply system was flashed with the diesel by running the engine on diesel about 40 minutes before changing from WCO biodiesel fuels to RO biodiesel fuels. During the measurements, multiple readings were recorded in order to minimise possible errors and to ensure repeatability of the observed data. Figure 3 illustrates the experimental setup used in this study. The test engine was equipped with a dual fuel supply system which can be operated manually by a T-junction valve. At the end of the test, the

280 engine was switched back to fossil diesel and operated for about 40 minutes to flush off the fuel supply and  
 281 injection systems. An eddy current (Froude Hofmann AG80HS) dynamometer, with  $\pm 1$  rpm speed and  $\pm 0.4$  Nm  
 282 torque accuracies was used. Fuel consumption of the engine was measured manually using a graduated cylinder  
 283 on the fuel supply line. A commercial (Bosh BEA 850) five-gas emission analyser was used for measuring the  
 284 tailpipe emissions. By this device, it was possible to measure the exhaust gases like HC, CO, CO<sub>2</sub>, O<sub>2</sub>, NO and  
 285 excess air ratio ( $\lambda$ ). Furthermore, the smoke intensity of the exhaust gas was analysed through the Bosch  
 286 RTM 430 smoke opacity measurement instrument. The combustion parameters of the test fuels were collected  
 287 through pressure sensor installed inside the first cylinder (close to radiator) of the engine. Kistler 6125C11  
 288 pressure sensor with the Kistler 5064B11 charge amplifier was installed for the measurement of in-cylinder  
 289 pressure. To log the fuel injection pressures, Kister 4065A500A0 pressure sensor along with the Kister 4618A0  
 290 amplifier was used. Crank angle was detected by using the Kister 2614A optical encoder. The Kister product,  
 291 2893AK8 model KiBox was installed to the system to log the data. The KiBoxCockpit software (supplied by  
 292 Kistler) was connected to the KiBox hardware through an ethernet connection for monitoring and analysing the  
 293 combustion parameters.


294

295 **Table 3**  
 296 Technical specification of the engine.

Manufacturer	Lister Petter (UK)
Model	LPWS Bio3 water cooled
Cylinder number	3
Exhaust gas recirculation	0%
Rated speed	1500 rpm
Continuous power at rated speed	9.9 kW
Fuel injection type	Indirect injection. Self-vent fuel system with individual fuel injection pumps
Fuel pump injection timing	20 ° BTDC
Aspiration	Naturally aspired
Cylinder capacity	1.395 L
Compression ratio	1:22
Continuous power fuel consumption at 1500 rpm	3.19 L/hr (fossil diesel)
Exhaust gas flow	41.4 L/sec at full loads at 1500 rpm
Jacket water flow at full load	33 L/min (at 1500 rpm)

297

298

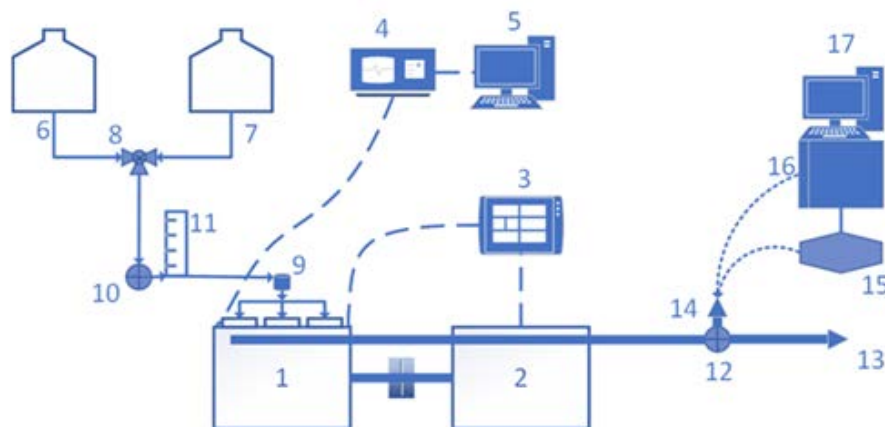

299

300

**Fig. 3.** Schematic of the engine test rig.

301 [1 engine; 2 dynamometer; 3 dynamometer controller; 4 Kister combustion analyser; 5 computer to collect & visualise combustion data; 6  
 302 fossil diesel tank; 7 biodiesel tank; 8 three-way valve; 9 fuel filter; 10 valve; 11 graduated cylinder to measure fuel consumption; 12 valve  
 303 on the exhaust line; 13 exhaust gas exit; 14 branch on the exhaust line to measure emissions; 15 smoke opacity unit; 16 Data acquisition for  
 304 smoke meter and exhaust gas analyser; 17 computer to collect & visualise exhaust gas emissions].



## 2.4 Error analysis

The error analysis is important for experimental studies. There are many factors that can cause uncertainties and errors in any experimental study such as environmental conditions, equipment selection and instrument calibration [33]. This error analysis helps to quantify the overall accuracy of the experimental investigation. Knowing the uncertainties of the exhaust gas analyser, dynamometer and the combustion analyser, specific uncertainties for BSFC, BTE, speed, load, time, crank angle, in-cylinder pressure and exhaust emissions were calculated by partial differentiation method (Table 4). This method was used for similar type of studies [33]. Specific uncertainties of the each parameter were calculated by minimum of 5 consecutive readings and overall uncertainty was calculated using equation 3.

$$Uncertainty = \sqrt{\sum (specific\ uncertainties)^2} = \pm 2.040\% \quad (3)$$

**Table 4**

The uncertainties of various parameters.


Measurements	Uncertainty (%)	Measurements	Uncertainty (%)
BSFC	0.8	CO <sub>2</sub>	0.1
BTE	0.8	O <sub>2</sub>	0.1
Speed	0.2	HC	0.9
Load	0.2	CO <sub>2</sub>	0.1
Time	0.8	NO	0.1
Crank angle	0.1	smoke	0.9
Cylinder pressure	0.7		

## 3. Results and discussion

In this section, fuel properties, engine performance, combustion characteristics, exhaust gas emissions and cost analysis of the test fuels are presented. The effects of 2-butoxyethanol additive on biodiesels are discussed, the results are compared with the corresponding results of the fossil diesel and neat biodiesels (W100 and R100).

### 3.1 Fuel properties

The FAME compositions of the biodiesels with and without 2-butoxyethanol additive are shown in Table 5. The major FAMES found in this study were C16:0, C18:0, C18:1 and C18:2. Peaks for the mentioned FAMES were clearly observed on the mass spectra and presented in Figure 4. According to GCMS results, for all biodiesels (including blends with 2-butoxyethanol), the first peaks were obtained at retention time of around 18 minutes which were representing the presence of the C16:0 (Figure 4 a, b, c and d). On the other hand, the following peaks between 21 and 22 minutes were accounted for C18 group FAMES such as C18:0, C18:1 and C18:2. It was clearly observed that 2-butoxyethanol additive effected the mass fractions of the C18:1 and C18:2 FAMES in the neat biodiesels by about 3% in W100 and 6% in R100. This phenomena directly influences the fuel properties especially cetane number and iodine value. According to BS EN 14214 standard for biodiesel, iodine value of biodiesel is directly proportional to FAME breakdown of the biodiesel [42]. Similarly, other fuel properties such as cetane number, lower heating value (LHV), density, cloud point etc. could also be predicted through FAME composition [44] (Table 2).

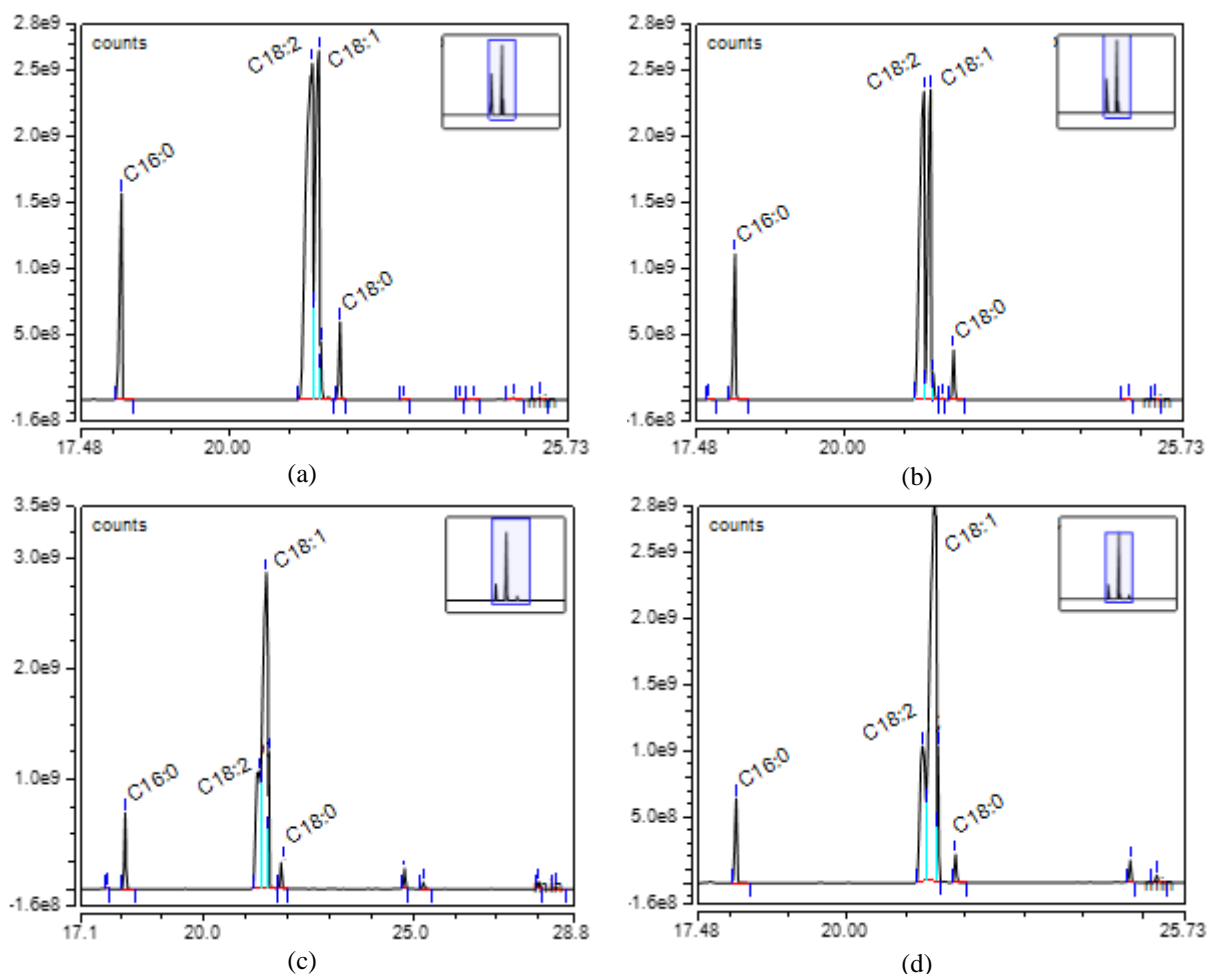

343 **Fig. 4.** Gas chromatography and mass spectrum analyse of (a) W100, (b) W85, (c) R100 and (d) R85.

344

345 **Table 5**

346 Mass percentages of the measured fatty acid methyl esters in biodiesels/blends.

FAME			Biodiesels/Blends			
Formula	Fatty acid	Designation	W100	W85	R100	R85
$C_{17}H_{34}O_2$	Palmitic	C16:0	10.4	10.1	4.1	4.3
$C_{17}H_{32}O_2$	Palmitoleic	C16:1	0.0	0.1	0.1	0.0
$C_{19}H_{38}O_2$	Stearic	C18:0	3.3	3.4	1.5	1.6
$C_{19}H_{36}O_2$	Oleic	C18:1	52.9	50	65.8	72.3
$C_{19}H_{34}O_2$	Linoleic	C18:2	32.8	36.0	26.0	19.2
$C_{19}H_{32}O_2$	Linolenic	C18:3	0.0	0.1	0.0	0.0
$C_{21}H_{42}O_2$	Arachidic	C20:0	0.2	0.0	0.5	0.5
$C_{21}H_{40}O_2$	gadoleic	C20:1	0.2	0.4	1.3	1.4
$C_{23}H_{46}O_2$	Behenic	C22:0	0.2	0.0	0.2	0.2
$C_{23}H_{44}O_2$	Erucic	C22:1	0.0	0.0	0.5	0.5

347

348

349 Table 6 shows the fuel properties of the test fuels and the British biodiesel norms ie. BS EN 14 214. The  
 350 kinematic viscosities (at 40 °C) of the W100 and R100 biodiesels were reduced by 12.5% and 9.8% respectively  
 351 when 15% (by volume) 2-butoxyethanol additive was added to biodiesels. The densities of the W100 and R100  
 352 biodiesels did not change with the addition of the additive, as 2-butoxyethanol has similar density value like  
 353 biodiesels (Table 1). However, the higher heating value (HHV) and flash point temperatures were negatively  
 354 affected by the 2-butoxyethanol additive. Due to the additive, the HHV of the W100 and R100 were reduced by

355 about 1% and 1.8% respectively. Similarly, the flash points of W85 and R85 were measured relatively low as 87  
 356 °C (decreased by about 49% than W100) and 81 °C (decreased by about 53% than R100). This requires more  
 357 precautions for storage and transportation of the W85 and R85 fuels. Iodine value and degree of unsaturation  
 358 were also slightly reduced due to the additive addition. Carbon, hydrogen and oxygen contents were not  
 359 significantly affected by the 2-butoxyethanol additive (Table 6). The cetane number was slightly improved when  
 360 2-butoxyethanol was added to biodiesel (Table 6). Overall, fuel characterisation results proved that 2-  
 361 butoxyethanol (by 15% volume) can be used as biodiesel additive to replace neat biodiesel or neat fossil diesel  
 362 use in the compression ignition (CI) engine.

363

364 **Table 6**  
 365 Fuel properties of the test fuels and BS EN 14214 standard.

Fuel Property	Unit	Method	Diesel	W100	W85	R100	R85	BS EN 14214
Kinematic Viscosity at 40°C	(mm <sup>2</sup> /s)	EN ISO 3104	2.78	5.05	4.42	4.6	4.15	3.5-5.0
Kinematic Viscosity at 20°C	(mm <sup>2</sup> /s)	EN ISO 3104	4.39	7.61	6.66	6.69	6.21	n/a
Density	(kg/m <sup>3</sup> )	EN ISO 3675	828	882	882	880	880	860-900
HHV	(MJ/kg)	Bomb calorimeter	45.16	38.4	38	39.2	38.5	n/a
LHV	(MJ/kg)	Theoretical	41.99	35.71	35.34	36.46	35.81	n/a
Flash point	(°C)	EN ISO 3679	61.5	169	87	173	81	101 min
Iodine value	(g iodine/100 g)	EN 14111	n/a	120	118	103	97	120 max
Linolenic acid methyl ester	(% m/m)	EN 14103	n/a	0	0	0	0	12
Cetane number	(-)	Calculated[44]	54	53	53	58	59	51 min
Cetane number	(-)	Calculated[43]	54	49	50	53	55	51 min
Degree of unsaturation	(% m/m)	Calculated[46]	n/a	2.39	2.37	2.20	2.13	n/a
Carbon content	(% m/m)	Theoretical[45]	86.6	77.14	77.13	77.12	77.08	n/a
Hydrogen content	(% m/m)	Theoretical[45]	13.4	11.91	11.93	12.04	12.08	n/a
Oxygen content	(% m/m)	Theoretical[45]	0.07	10.95	10.95	10.84	10.84	n/a

366

367

### 368 3.2 Engine performance

369

370 The biodiesel-additive blends gave higher BSFC than both neat biodiesels and fossil diesel (Figure 5). On  
 371 average, BSFC of the W85 was 4.3% and 14.1% higher than W100 and diesel fuel respectively. Similarly,  
 372 BSFC of the R85 was observed as 5.2% and 18.8% greater than R100 and diesel respectively. This increase on  
 373 BSFC can be attributed to the reduced LHV of the blends (due to addition of additive) (Table 6). However, it  
 374 was found out that the BSFC of the biodiesel blends were improved with the increase in engine load. At  
 375 maximum load, the BSFC of the biodiesel blends were only 1% higher than neat biodiesels. This was mainly  
 376 due to the higher enthalpy of vaporisation of the blends, which led to better combustion under higher engine  
 377 loads (ie. temperatures) [26]. Both W85 and R85 fuels produced similar BSFC trends; however, BSFC of W85  
 378 fuel was slightly (0-3%) lower than that of R85 fuel (Figure 5). Figure 6 shows the relationship between the  
 379 brake Thermal Efficiency (BTE) and engine load for all test fuels. Compared to neat biodiesels, the BTE of the  
 380 engine was observed 3-6% lower for W85 and R85 fuels. However, the results showed that of all the test fuels,  
 381 W100 and W85 fuels gave highest BTE. The BTE of the W100 and W85 fuels were approximately 5% and 3%  
 382 higher than the corresponding fossil diesel values. The improved BTE's can be explained by the higher oxygen  
 383 content of the biodiesels which in turn enhances the combustion [47,48]. Despite the fact that the HHV of W100  
 384 and W85 were lower than fossil diesel, the presence of fuel borne oxygen content improved the diffusion  
 385 combustion, which resulted higher BTE [49]. On the other hand, R85 fuel provided slightly lower BTE than the  
 386 fossil diesel. The BTE of the R100 fuel was around 4% lower than that of W100. These differences in BTE  
 387 values between two different biodiesels could be attributed to their fuel properties such as oxygen content,  
 388 density and iodine value (Table 6).

389

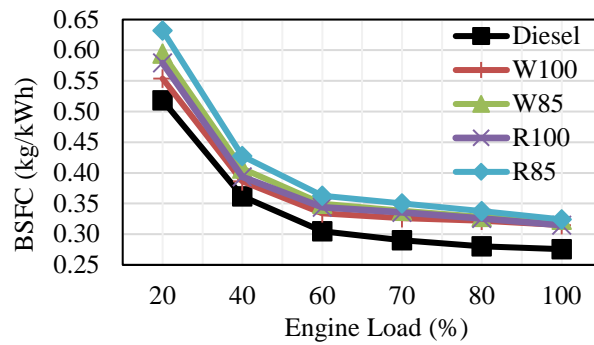


Fig. 5. BSFC of test fuels as a function of the engine loads.


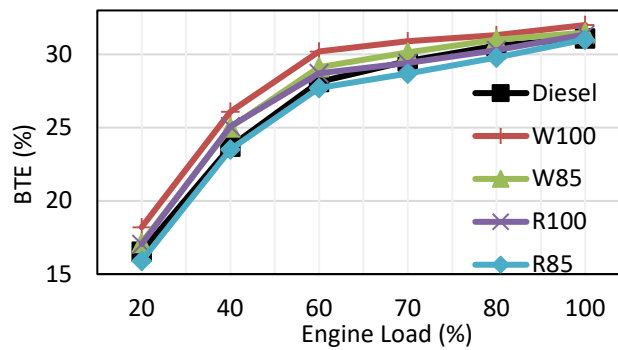


Fig. 6. BTE of test fuels as a function of engine loads.

### 3.3 Combustion characteristics


Combustion parameters data such as total heat release, heat release rate, in-cylinder pressure, combustion start and finish times, total combustion duration, fuel injection pressure and knock intensity were recorded and analysed. In-cylinder pressure and heat release data were presented (using 51 cycles) with respect to the crank angle position. Whereas, rest of the combustion parameters were illustrated with respect to the engine load, the arithmetic average of 51 indication cycles were used. Engine was stable with all fuels including biodiesel-additive blends. Figure 7 represents in-cylinder pressure behaviour of the test fuels at low, mid-range, and high loads. At the lowest load (20%), in-cylinder pressures of the neat biodiesels (W100 and R100) were quite similar to those obtained for fossil diesel. Whereas, the peak in-cylinder pressures at lowest load were found to be approximately 6% higher for W85 and R85 fuels (Figure 7a). The higher values of the peak in-cylinder pressures were caused due to the increased volatility of the biodiesel blends. The results also indicated that as the engine load increases, the in-cylinder pressures of the neat biodiesels were also increased almost at a similar rate with the biodiesel blends. For example, at 60% engine load, R100 and R85 fuels provided similar peak in-cylinder pressure; however, they are approximately 7.7% higher than the corresponding value of fossil diesel (Figure 7b). Increased in-cylinder pressures observed for biodiesels and their blends proved that combustion was improved due to the presence of higher oxygen content in those fuels. At full load condition, all biofuels gave about 6% higher peak pressures than the corresponding value obtained for fossil diesel (Figure 7d). At full load, peak in-cylinder pressure of all biodiesels (and blends) was delayed by about 5 °CA when compared to fossil diesel (Figure 7d). This was caused due to the relatively higher ignition delays of the biodiesels and their blends than the corresponding value of fossil diesel.

418  
419

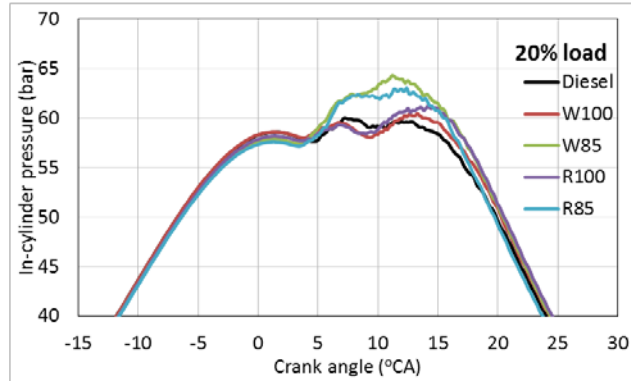


(a)

420  
421

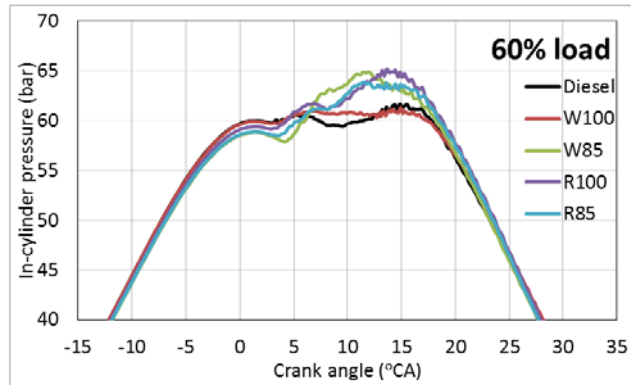


(b)

422  
423

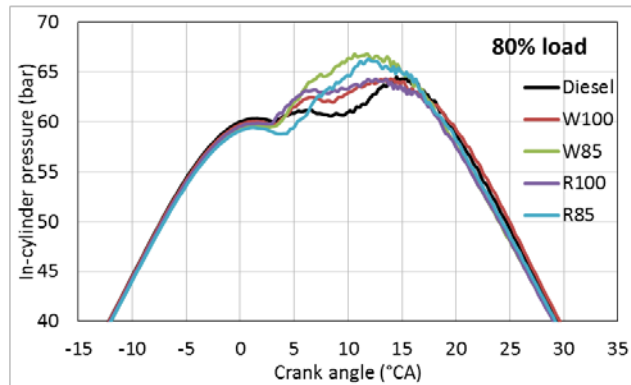

(c)

424  
425

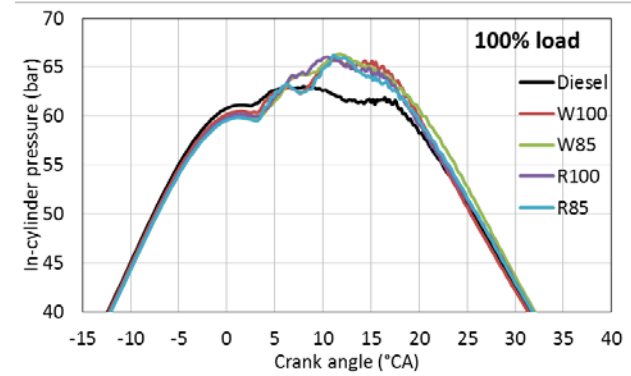


(d)

426

**Fig. 7.** In-cylinder pressure and crank angles at (a) 20% (b) 60% (c) 80% and (d) 100% loads.

427 Start and end of combustion were analysed and presented in Figure 8. Combustion start angle was measured  
 428 when 5% of the combustion took place and similarly combustion finish angle was recorded at 90% of the total  
 429 combustion (Figure 8a and 8b). The differences between the finish and start angles were reported to identify the  
 430 total combustion duration (Figure 8c). In most engine loads, start of combustion of biodiesel-additive blends  
 431 were earlier than fossil diesel (Figure 8a). However, it was found that end of combustion for biodiesel-additive  
 432 blends occurred earlier than fossil diesel and neat biodiesels (Figure 8b). These results agree with the similar  
 433 studies (with different alcohol blends) found in the literature [24,49].


434

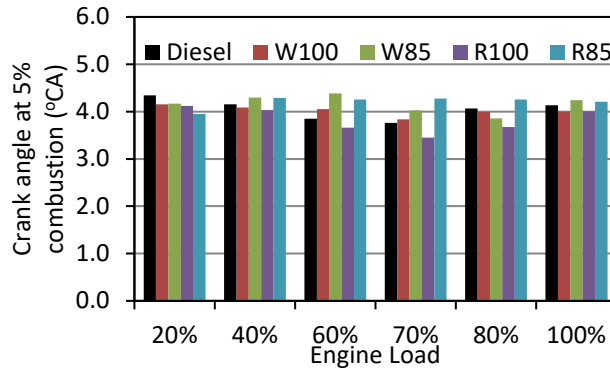

435

436


(a)

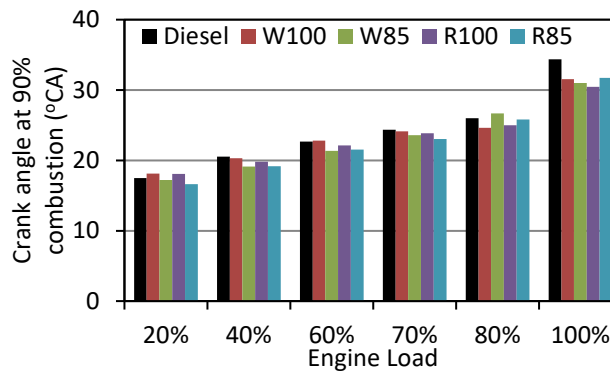

437

438

(b)

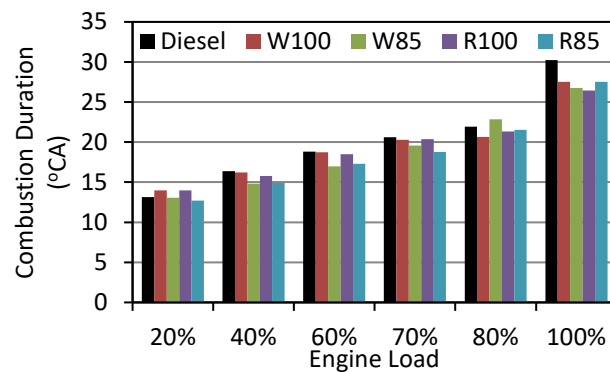

439

440

(c)


441 **Fig. 8.** Combustion characteristics: (a) start of combustion, (b) end of combustion, and (c) combustion duration.

442

443 Total combustion duration of the W85 fuel was approximately 0-4 °CA and 0-1 °CA lower than fossil diesel  
 444 and W100 fuel respectively (except 80% load) – Figure 8c. Similarly, combustion duration of the R85 was

445 reported 1-2 °CA less than both diesel and R100 at low and mid-range loads. When compared to fossil diesel,  
 446 maximum reductions in combustion duration were observed at the highest load by approximately 3 °CA, 4 °CA,  
 447 4 °CA and 3 °CA for W100, W85, R100 and R85 respectively (Figure 8c). This analyses proved that once  
 448 combustion starts, 2-butoxyethanol blends of biodiesels burn quicker than fossil diesel and neat biodiesels.  
 449 Reduced viscosity and higher oxygen content in the biodiesel-additive blends might have caused this behaviour.  
 450 Moreover, increased volatility and better dissociation of fuel molecules might have helped in rapid burning of  
 451 the 2-butoxyethanol blends. Energy release data of all fuels are shown in Figure 9. W85 and R85 fuels were  
 452 providing higher heat release especially during the early phases ie. between approximately 3 ° and 15 ° CA at all  
 453 engine loads. For example, at the low (20%) and medium (60%) engine loads, heat release data of both W85 and  
 454 R85 fuels at 10 °CA was about 17% (23 Joules) higher than the corresponding values of fossil diesel and neat  
 455 biodiesels (Figure 9). The higher heat release of the biodiesel-additive blends (W85 and R85) can be attributed  
 456 to their increased volatility and lower viscosity. On the other hand, it was found that at high load, due to the high  
 457 combustion temperature, heat release of the blends and neat biodiesels were comparable (Figure 9d). Maximum  
 458 heat release rates of the fuels were analysed for 51 cycles and the arithmetic mean is shown in Figure 10.  
 459 Similar to heat release, no clear trend was observed for maximum heat release rates at low loads. However, it  
 460 was seen that, after 60% engine load, the deviations in heat release rates between the biodiesels and their blends  
 461 with additive were not significant. The first reason of this was believed to be relatively higher combustion  
 462 temperature which eliminates the effect of high viscosities. Secondly, the higher enthalpy of vaporisation of 2-  
 463 butoxyethanol resulted in achieving better maximum heat release rates at higher combustion temperatures.


464

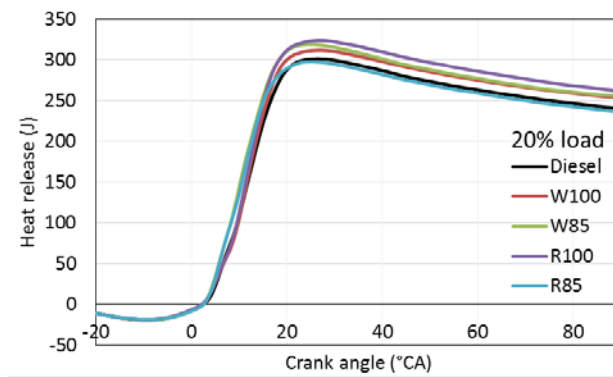

465

466


(a)

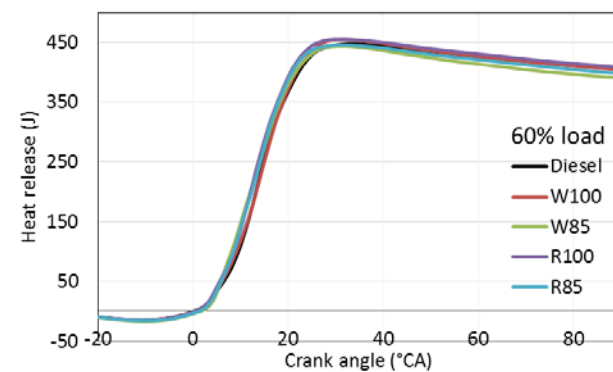

467


468

(b)

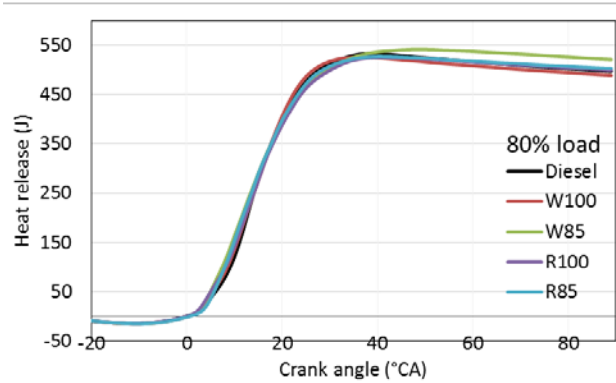

469  
470

(c)

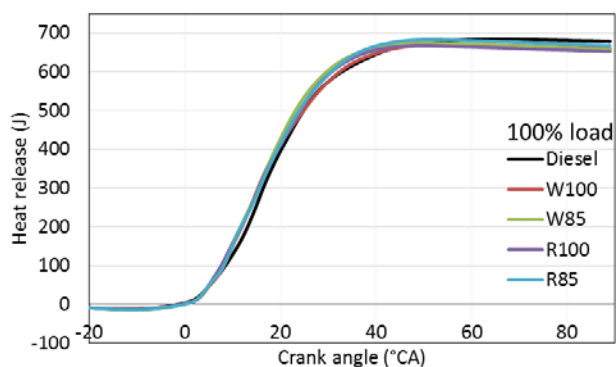


471  
472

(d)

473 **Fig. 9.** Heat release of the test fuels at various loads: (a) at 20%, (b) at 60%, (c) at 80%, and (d) at 100% loads.

474

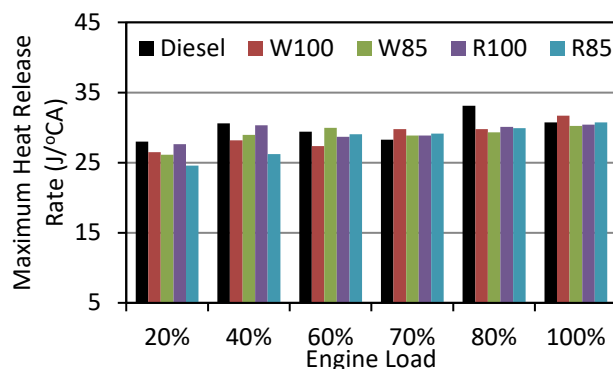

475  
476  
477

**Fig. 10.** Maximum heat release rates of the fuels at different engine loads.

### 478 3.4 Exhaust gas emissions


479  
480  
481  
482  
483  
484  
485  
486

Figure 11 shows variation of CO<sub>2</sub> gas emissions with engine loads. It was observed that CO<sub>2</sub> gas emissions were increased with the increase in engine loads (Figure 11) as fuel consumption increases with the increase in engine load. Although, all test fuels exhibited comparable CO<sub>2</sub> emissions, biodiesel blends were emitting slightly higher (approximately 1-2%) CO<sub>2</sub> than other fuels. This slight increased may be due to the enhanced combustion of the 2-butoxyethanol blends which turns more carbon atoms into carbon dioxide. Unlike CO<sub>2</sub> emission, O<sub>2</sub> emissions were linearly decreasing with the increasing engine load (Figure 12). The amount of air intake is constant, and as a result, the O<sub>2</sub> gas emission decreases due to the increased reaction between the



487 relatively higher amount of fuel molecules and the same amount of air (oxygen) molecules at the higher loads.  
 488 Theoretically, biodiesels are likely to reduce the HC emission as the additional oxygen content provides more  
 489 complete combustion [50]. Hence, biodiesel blends were expected to emit reduced HC emission as total oxygen  
 490 content increases with addition of 2-butoxyethanol additive. Experimental results proved the theory as W85 and  
 491 R85 emitted almost up to 100% reduced HC emissions than both their neat biodiesel versions and the fossil  
 492 diesel (Figure 13). However, R85 provided uneven HC emission distribution (Figure 13), this could be due to  
 493 the error in measurement and accuracy level of the gas analyser.


494

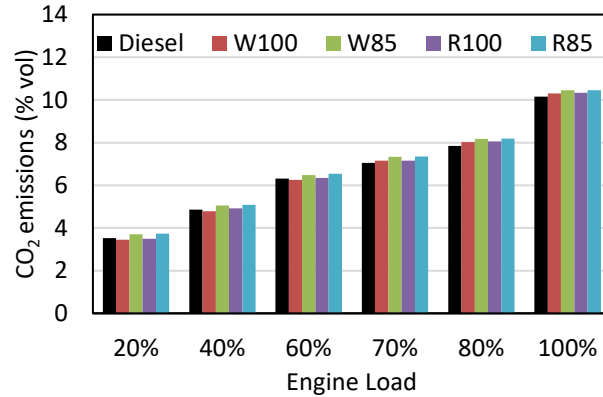

495

496 **Fig. 11.** CO<sub>2</sub> emissions of the test fuels at different engine loads.


497

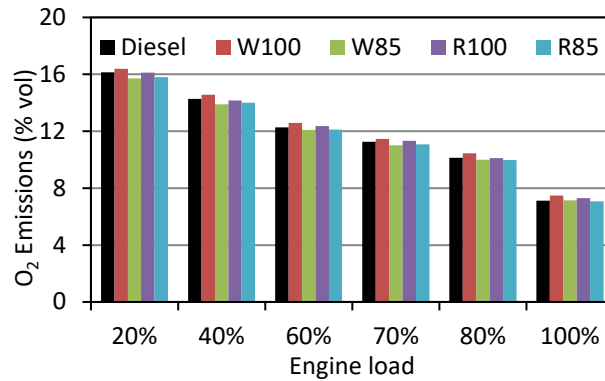

498

499 **Fig. 12.** O<sub>2</sub> emissions of the test fuels at different engine loads.

500

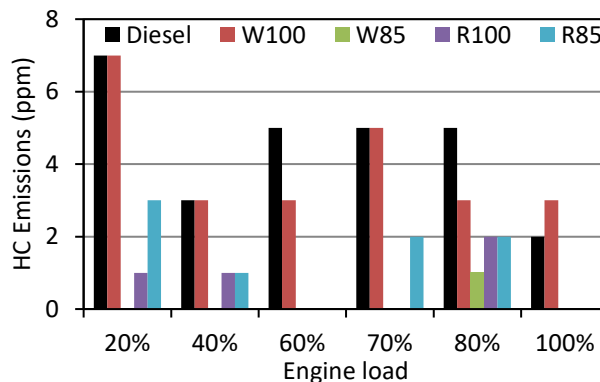


501

502 **Fig. 13.** HC emissions of the test fuels at different engine loads.

503 Figure 14 provides the CO emissions of the test fuels at different loads. It can be clearly deemed that on  
 504 average, addition of 2-butoxyethanol into WCO biodiesel decreased the CO emission by approximately 25%. In  
 505 contrast, 2-butoxyethanol additive increased the CO emission by around 12% when added to RO biodiesel. This  
 506 result shows that type of biodiesel feedstock is important for 2-butoxyethanol blending. Furthermore, W85  
 507 emitted 10% less CO (on average) compared to fossil diesel. The reduction in CO emission was presumably due  
 508 to relatively higher oxygen content (Table 6) and reduced viscosity of the WCO biodiesel which led to better  
 509 combustion [51].

510

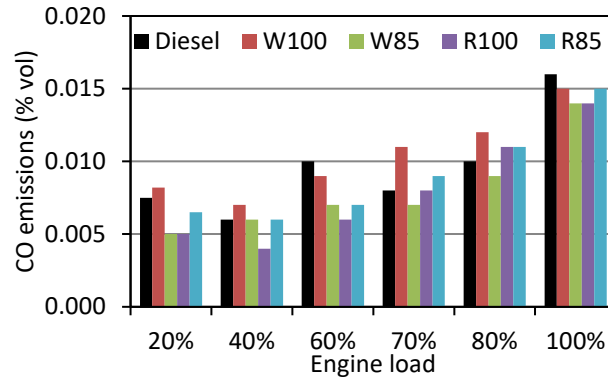


511

512 **Fig. 14.** CO emissions of the test fuels at different engine loads.

513

514 Emission of nitrogen oxide gas is shown in Figure 15. The 2-butoxyethanol blends exhibited different  
 515 behaviours at low, medium and high loads. To illustrate, until the 40% engine load, W85 emitted around 15%  
 516 higher NO emission than W100 fuel. Then at medium loads, NO emissions of W100 and W85 were comparable.  
 517 At full load, W85 fuel gave about 5.4% and 3.5% lower NO emission than neat biodiesel and fossil diesel  
 518 respectively. Figure 16 presents smoke opacity of the test fuels at various loads. It was clearly observed that  
 519 smoke opacities of the biodiesels (and blends) were significantly reduced when the load on the engine was  
 520 increased. Compared to fossil diesel, maximum reductions on smoke opacities were recorded at the highest  
 521 engine load as 73%, 79%, 66% and 71% for W100, W85, R100 and R85 fuels respectively. Reductions in  
 522 smoke opacities were attributed to the extra oxygen content present in biodiesels (and blends) [52]. At full load,  
 523 the smoke opacity values of the biodiesel-additive blends were approximately 5% lower than the corresponding  
 524 values found for neat biodiesels.

525

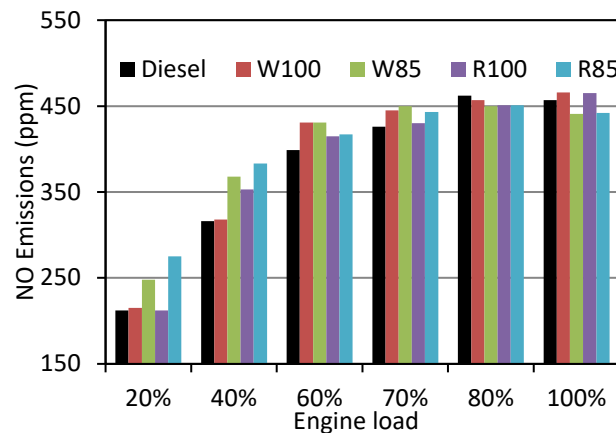

526

527 **Fig. 15.** NO emissions as a function of engine load.

528

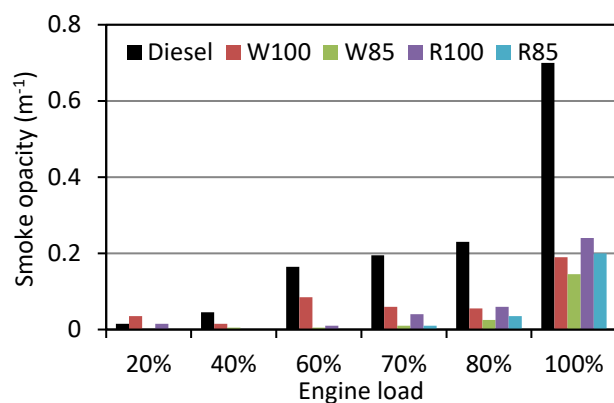


Fig. 16. Smoke opacity of the test fuels at different engine loads.

### 3.5 Economic feasibility analysis

A simple economic analysis was carried out to analyse the feasibility of using 2-butoxyethanol as biodiesel additive. Waste cooking oil was obtained from a restaurant in Birmingham, UK. Whereas, RO was bought from a commercial supplier. Table 7 shows list of materials with their quantity to prepare a litre of biodiesel and the biodiesel-additive blends. Note that, materials used for titration purposes such as isopropyl alcohol and indicator were not included in the analysis. In addition, it was assumed that the electrical power consumptions for heating and mechanical stirring were negligible. According to the data provided by the Department for Business, Energy & Industrial Strategy [53], diesel price in the UK was 115.63 pence/litre (including tax) on 3 July 2017. Table 8 shows the total cost of fuel samples, W100 and W85 fuels were approximately 100 and 35 pence/litre cheaper than the commercial fossil diesel. In addition, the cost of R100 was found to be equal to that of fossil diesel. However, the cost of the R85 was around 55 pence/litre higher than the diesel due to its feedstock price (Table 7).

**Table 7**  
Quantity and the price of materials used to produce 1 litre of test fuel.

Substance	Quantity required to produce 1 L biodiesel	Quantity required to produce 1L 85%biodiesel-15%alcohol blend	Unit Price
WCO	1 L	0.85 L	0
RO	1 L	0.85 L	1 £/ L
Methanol	0.2 L	0.17 L	0.7 £/ L
KOH for WCO	10.5 g	8.9 g	1.5 £/kg
KOH for RO	8.2 g	7.0 g	1.5 £/kg
2-Butoxyethanol	0	0.15 L	4.8 £/ L

**Table 8**  
Total costs of one litre fuel samples.

	Cost of W100 £/ L	Cost of W85 £/ L	Cost of R100 £/ L	Cost of R85 £/ L
Feedstock (WCO or RO)	0	0	1	0.85
Methanol	0.14	0.12	0.14	0.12
KOH	0.02	0.01	0.01	0.01
2-Butoxyethanol	0	0.72	0	0.72
<b>Total cost</b>	<b>0.16</b>	<b>0.85</b>	<b>1.15</b>	<b>1.70</b>

## 4. Conclusion

The 2-butoxyethanol additive (15% by volume) was added separately to waste cooking oil biodiesel and rapeseed oil biodiesel. The physical and chemical properties of these blends were measured and compared to the corresponding properties of the neat biodiesels and fossil diesel fuels. The fuels were tested in a multi-cylinder compression ignition engine. Engine performance, combustion and emission characteristics of the 2-butoxyethanol-WCO biodiesel (W85) and the 2-butoxyethanol-RO biodiesel (R85) blends were compared to both neat biodiesels (W100 & R100) and fossil diesel. No instability or abnormalities were observed in the in-cylinder pressure diagrams; i.e. the engine ran smoothly when 2-butoxyethanol-biodiesel blend was used in the engine. Overall, 2-butoxyethanol additive gave improved emissions when used with both biodiesels. However, considering engine performance, emission reduction and cost parameters, it was found out that 2-butoxyethanol-WCO biodiesel blend was superior to the 2-butoxyethanol-RO biodiesel blend. The major findings of the study are summarised below:

(i) BSFC of the WCO biodiesel was increased by approximately 4.3% when blended with the 2-butoxyethanol additive. The BSFC of the R85 was observed as 5.2% and 18.8% greater than R100 and diesel respectively. The additive decreased BTE of the W100 fuel by about 2.6%. Nevertheless, BTE of the W85 fuel was still 3.7% higher than the diesel.

(ii) Both W85 and R85 fuels released around 17% higher energy at the early stages of the combustion. At 80% engine load, the maximum heat release of the W85 was approximately 6.5% and 4.8% greater than the W100 and diesel respectively. Total combustion duration of the W85 was 4 °CA shorter than the fossil diesel fuel on average.

(iv) The NO emission of the W100 fuel was comparable with the diesel at the maximum engine load. W85 fuel reduced the NO emission by 5.4% and 3.5% when compared to the corresponding values of the W100 and neat fossil diesel. Both W85 and R85 fuels emitted almost up to 100% reduced HC emissions than neat biodiesels and the fossil diesel. Compared to diesel, W85 fuel gave significant reductions in CO, HC and smoke emissions by 36%, 100% and 79% respectively.

(v) Basic economic analysis showed that a litre of W85 fuel was about 30 pence cheaper than the commercial fossil diesel.

This study concludes that the 2-butoxyethanol could be used as an effective and safe biodiesel additive. Current study proved that 2-butoxyethanol additive enhanced the fuel properties, and gave significant improvement in engine performance and emission when the additive was added to WCO biodiesel. However, it should be noted that depending on the source of biodiesel feedstock, 2-butoxyethanol-biodiesel blends can be more expensive than fossil diesel. Further techno-economic analyses using other biodiesels need to be carried out and recommended as a future work. Investigation on the effects of fossil diesel addition (as a third component) into the 2-butoxyethanol-biodiesel blend is another R & D topic.

## Acknowledgments

This study was supported by: (i) PhD scholarship, School of Engineering and Applied Science, Aston University, UK (ii) UKIERI funded project 'Waste to Engine – Low Temperature Combustion of Sustainable Green Fuels'.

## References

- [1] Z.D. Ristovski, B. Miljevic, N.C. Surawski, L. Morawska, K.M. Fong, F. Goh, I.A. Yang, Respiratory health effects of diesel particulate matter, *Respirology*. 17 (2012) 201–212. <https://doi.org/10.1111/j.1440-1843.2011.02109.x>.
- [2] J.O. Anderson, J.G. Thundiyil, A. Stolbach, Clearing the air: a review of the effects of particulate matter air pollution on human health, *J. Med. Toxicol.* 8 (2012) 166–175. <https://doi.org/10.1007/s13181-011-0203-1>.

- 602 [3] L.C. Chen, M. Lippmann, Effects of metals within ambient air particulate matter (PM) on human health,  
603 *Inhal. Toxicol.* 21 (2009) 1–31. <https://doi.org/10.1080/08958370802105405>.
- 604 [4] J.-H. Tsai, S.J. Chen, K.L. Huang, W.Y. Lin, W.J. Lee, C.C. Lin, L.T. Hsieh, J.Y. Chiu, W.C. Kuo,  
605 Emissions from a generator fueled by blends of diesel, biodiesel, acetone, and isopropyl alcohol:  
606 analyses of emitted PM, particulate carbon, and PAHs, *Sci. Total Environ.* 466 (2014) 195–202.  
607 <https://doi.org/10.1016/j.scitotenv.2013.07.025>.
- 608 [5] C.C. Lin, S.J. Chen, K.L. Huang, W.I. Hwang, G.P. Chang Chien, W.Y. Lin, Characteristics of metals  
609 in nano/ultrafine/fine/coarse particles collected beside a heavily trafficked road, *Environ. Sci. Technol.*  
610 39 (2005) 8113–8122. <https://doi.org/10.1021/es048182a>.
- 611 [6] C.C. Lin, S.J. Chen, K.L. Huang, W.J. Lee, W.Y. Lin, J.H. Tsai, H.C. Chung, PAHs, PAH-induced  
612 carcinogenic potency, and particle-extract-induced cytotoxicity of traffic-related nano/ultrafine particles,  
613 *Environ. Sci. Technol.* 42 (2008) 4229–4235. <https://doi.org/10.1021/es048182a> 10.1021/es703107w.
- 614 [7] S.C. Chuang, S.J. Chen, K.L. Huang, E.M.Y. Wu, G.P. Chang Chien, L.C. Wang, Gas/particle  
615 partitioning of dioxins in exhaust gases from automobiles, *Aerosol Air Qual. Research.* 10 (2010) 489–  
616 496. <https://doi.org/10.1021/es048182a> 10.4209/aaqr.2010.04.0028.
- 617 [8] Y. He, D.B. Brown, S. Lu, M.J. Paratore, J. Li, Opportunities and challenges for blended 2-way  
618 SCR/DPF aftertreatment technologies, *SAE Tech. Pap.* 2009-01-0274. 1 (2009) 14.  
619 <https://doi.org/10.4271/2009-01-0274>.
- 620 [9] J.M. López, F. Jiménez, F. Aparicio, N. Flores, On-road emissions from urban buses with SCR+ Urea  
621 and EGR+ DPF systems using diesel and biodiesel, *Transp. Res. Part D Transp. Environ.* 14 (2009) 1–5.  
622 <https://doi.org/10.1016/j.trd.2008.07.004>.
- 623 [10] Y. Sogawa, H. Hattori, N. Yanagisawa, M. Hosoya, T. Shoji, Y. Iwakiri, T. Yamashita, T. Ikeda, S.  
624 Tanaka, K. Takahashi, others, Nano particle emission evaluation of state of the art diesel aftertreatment  
625 technologies (DPF, urea-SCR and DOC), gasoline combustion systems (Lean Burn/Stoichiometric DISI  
626 and MPI) and fuel qualities effects (EtOH, ETBE, FAME, Aromatics and Distillation), *SAE Trans.* 116  
627 (2007) 1013–1023. doi:[www.jstor.org/stable/44650937](http://www.jstor.org/stable/44650937).
- 628 [11] A.E. Atabani, A.S. Silitonga, I.A. Badruddin, T.M.I. Mahlia, H.H. Masjuki, S. Mekhilef, A  
629 comprehensive review on biodiesel as an alternative energy resource and its characteristics, *Renew.*  
630 *Sustain. Energy Rev.* 16 (2012) 2070–2093. doi:10.1016/j.rser.2012.01.003.
- 631 [12] A.K. Hossain, P.A. Davies, Performance, emission and combustion characteristics of an indirect  
632 injection (IDI) multi-cylinder compression ignition (CI) engine operating on neat jatropha and karanj  
633 oils preheated by jacket water, *Biomass and Bioenergy.* 46 (2012) 332–342.  
634 <https://doi.org/10.1016/j.biombioe.2012.08.007>.
- 635 [13] K. Masera, A.K. Hossain, Production , Characterisation and assessment of biomixture fuels for  
636 compression ignition engine application, *Int. J. Mech. Mechatronics Eng.* 11 (2017) 1857–1863.  
637 doi:[scholar.waset.org/1307-6892/10008317](http://scholar.waset.org/1307-6892/10008317).
- 638 [14] A.K. Hossain, P.A. Davies, Pyrolysis liquids and gases as alternative fuels in internal combustion  
639 engines - A review, *Renew. Sustain. Energy Rev.* 21 (2013) 165–189. doi:10.1016/j.rser.2012.12.031.
- 640 [15] Y. Yang, T. Fu, W. Bao, G.H. Xie, Life cycle analysis of greenhouse gas and PM2.5 emissions from  
641 restaurant waste oil used for biodiesel production in china, *Bioenergy Res.* 10 (2017) 199–207.  
642 doi:10.1007/s12155-016-9792-5.
- 643 [16] M. Mofijur, A.E. Atabani, H.H. Masjuki, M.A. Kalam, B.M. Masum, A study on the effects of  
644 promising edible and non-edible biodiesel feedstocks on engine performance and emissions production:  
645 A comparative evaluation, *Renew. Sustain. Energy Rev.* (2013). doi:10.1016/j.rser.2013.03.009.
- 646 [17] S.M. Palash, M.A. Kalam, H.H. Masjuki, B.M. Masum, I.M. Rizwanul Fattah, M. Mofijur, Impacts of  
647 biodiesel combustion on NOx emissions and their reduction approaches, *Renew. Sustain. Energy Rev.*  
648 23 (2013) 473–490. doi:10.1016/j.rser.2013.03.003.
- 649 [18] S.K. Hoekman, C. Robbins, Review of the effects of biodiesel on NOx emissions, *Fuel Process.*  
650 *Technol.* (2012). doi:10.1016/j.fuproc.2011.12.036.

- 651 [19] P. Verma, M.P. Sharma, G. Dwivedi, Evaluation and enhancement of cold flow properties of palm oil  
652 and its biodiesel, *Energy Reports*. 2 (2016) 8–13. doi:10.1016/j.egy.2015.12.001.
- 653 [20] A. Datta, B.K. Mandal, Engine performance, combustion and emission characteristics of a compression  
654 ignition engine operating on different biodiesel-alcohol blends, *Energy*. 125 (2017) 470–483.  
655 <https://doi.org/10.1016/j.energy.2017.02.110>.
- 656 [21] P.V. Bhale, N. V. Deshpande, S.B. Thombre, Improving the low temperature properties of biodiesel  
657 fuel, *Renew. Energy*. 34 (2009) 794–800. doi:10.1016/j.renene.2008.04.037.
- 658 [22] L.N. Silva, C.C. Cardoso, V.M.D. Pasa, Production of cold-flow quality biodiesel from high-acidity on-  
659 edible oils—esterification and transesterification of macauba (*acrocomia aculeata*) oil using various  
660 alcohols, *Bioenergy Res*. 9 (2016) 864–873. doi:10.1007/s12155-016-9740-4.
- 661 [23] K. Varatharajan, M. Cheralathan, Influence of fuel properties and composition on NO<sub>x</sub> emissions from  
662 biodiesel powered diesel engines: A review, *Renew. Sustain. Energy Rev*. 16 (6) (2012) 3702–3710.
- 663 [24] L. Zhu, C.S. Cheung, W.G. Zhang, Z. Huang, Emissions characteristics of a diesel engine operating on  
664 biodiesel and biodiesel blended with ethanol and methanol, *Sci. Total Environ*. 408 (2010) 914–921.  
665 <https://doi.org/10.1016/j.scitotenv.2009.10.078>.
- 666 [25] M.H.M. Yasin, T. Yusaf, R. Mamat, A.F. Yusop, Characterization of a diesel engine operating with a  
667 small proportion of methanol as a fuel additive in biodiesel blend, *Appl. Energy*. 114 (2014) 865–873.  
668 doi:10.1016/j.apenergy.2013.06.012.
- 669 [26] N. Yilmaz, Performance and emission characteristics of a diesel engine fuelled with biodiesel–ethanol  
670 and biodiesel–methanol blends at elevated air temperatures, *Fuel*. 94 (2012) 440–443.  
671 <https://doi.org/10.1016/j.fuel.2011.11.015>.
- 672 [27] N. Vedaraman, S. Puhan, G. Nagarajan, K.C. Velappan, Preparation of palm oil biodiesel and effect of  
673 various additives on NO<sub>x</sub> emission reduction in B20: An experimental study, *Int. J. Green Energy*. 8  
674 (2011) 383–397. <https://doi.org/10.1080/15435075.2011.557847>.
- 675 [28] N. Yilmaz, Comparative analysis of biodiesel–ethanol–diesel and biodiesel–methanol–diesel blends in  
676 a diesel engine, *Energy*. 40 (2012) 210–213. <https://doi.org/10.1016/j.energy.2012.01.079>.
- 677 [29] E. Tosun, A.C. Yilmaz, M. Ozcanli, K. Aydin, Determination of effects of various alcohol additions into  
678 peanut methyl ester on performance and emission characteristics of a compression ignition engine, *Fuel*.  
679 126 (2014) 38–43. <https://doi.org/10.1016/j.fuel.2014.02.037>.
- 680 [30] S. Sarıkoç, S. Ünalın, İ. Örs, Experimental study of hydrogen addition on waste cooking oil biodiesel-  
681 diesel-butanol fuel blends in a di diesel engine, *Bioenergy Res*. 12 (2019) 443–456.  
682 doi:10.1007/s12155-019-09980-x.
- 683 [31] S. Saravanan, R. Kaliyanasunder, B. Rajesh Kumar, G. Lakshmi Narayana Rao, Effect of design  
684 parameters on performance and emissions of a CI engine operated with diesel-biodiesel- higher alcohol  
685 blends, *Renew. Energy*. 148 (2020) 425–436. doi:10.1016/j.renene.2019.10.049.
- 686 [32] T. Zhang, J. Eismark, K. Munch, I. Denbratt, Effects of a wave-shaped piston bowl geometry on the  
687 performance of heavy duty Diesel engines fueled with alcohols and biodiesel blends, *Renew. Energy*.  
688 148 (2020) 512–522. doi:10.1016/j.renene.2019.10.057.
- 689 [33] Radheshyam, K. Santhosh, G.N. Kumar, Effect of 1-pentanol addition and EGR on the combustion,  
690 performance and emission characteristic of a CRDI diesel engine, *Renew. Energy*. 145 (2020) 925–936.  
691 doi:10.1016/j.renene.2019.06.043.
- 692 [34] J.D. Rogers, T.L. Burke, S.G. Osborn, J.N. Ryan, A framework for identifying organic compounds of  
693 concern in hydraulic fracturing fluids based on their mobility and persistence in groundwater, *Environ.*  
694 *Sci. Technol. Lett*. 2 (2015) 158–164. doi:10.1021/acs.estlett.5b00090.
- 695 [35] Robert E. Sievers and Thomas J. Wenzel, Liquid hydrocarbon-soluble rare earth chelates prepared from  
696 the novelligand 2,2,7-trimethyl-3,5-octanedione and fuels Containing Same, 1981. doi:United States  
697 Patent Appl. No.: 17,459.
- 698 [36] Methyl-Alcohol, National center for biotechnology information, PubChem Open Chem. Database.

- 699 (2018). <https://pubchem.ncbi.nlm.nih.gov/compound/887#section=Top> (accessed July 16, 2018).
- 700 [37] Ethanol, National center for biotechnology information, PubChem Open Chem. Database. (2018).  
701 <https://pubchem.ncbi.nlm.nih.gov/compound/702#section=Top> (accessed July 16, 2018).
- 702 [38] Butyl-Alcohol, National center for biotechnology information, PubChem Open Chem. Database. (2018).  
703 <https://pubchem.ncbi.nlm.nih.gov/compound/263#section=Top> (accessed July 16, 2018).
- 704 [39] 2-Butoxyethanol, National center for biotechnology information, PubChem Open Chem. Database.  
705 (2018). <https://pubchem.ncbi.nlm.nih.gov/compound/2-Butoxyethanol#section=Top> (accessed July 16,  
706 2018).
- 707 [40] Fisher Scientific, 2-Butoxyethanol, 99%, ACROS OrganicsTM, (2018) 1.  
708 <https://www.fishersci.com/shop/products/2-butoxyethanol-99-acros-organics-5/p-3735784> (accessed  
709 June 26, 2018).
- 710 [41] Esso, Esso synergy diesels, (2019). <https://www.esso.co.uk/diesel> (accessed March 5, 2019).
- 711 [42] British Standard Institution, Bs En 14214:2008+a1:2009 Automotive fuels — Fatty acid methyl esters  
712 (FAME) for diesel engines — Requirements and test methods, Br. Stand. Inst. (2010) 22. doi:ISBN 978  
713 0 580 70781 0.
- 714 [43] D. Tong, C. Hu, K. Jiang, Y. Li, Cetane number prediction of biodiesel from the composition of the  
715 fatty acid methyl esters, *J. Am. Oil Chem. Soc.* 88 (2011) 415–423. doi:10.1007/s11746-010-1672-0.
- 716 [44] L.F. Ramírez-Verduzco, J.E. Rodríguez-Rodríguez, A.D.R. Jaramillo-Jacob, Predicting cetane number,  
717 kinematic viscosity, density and higher heating value of biodiesel from its fatty acid methyl ester  
718 composition, *Fuel*. 91 (2012) 102–111. doi:10.1016/j.fuel.2011.06.070.
- 719 [45] A. Schönborn, N. Ladommatos, J. Williams, R. Allan, J. Rogerson, The influence of molecular structure  
720 of fatty acid monoalkyl esters on diesel combustion, *Combust. Flame*. 156 (2009) 1396–1412.  
721 doi:10.1016/j.combustflame.2009.03.011.
- 722 [46] M.D. Redel Macías, S. Pinzi, D.E. Leiva Candia, A.J. Cubero Atienza, M.P. Dorado, Influence of fatty  
723 acid unsaturation degree over exhaust and noise emissions through biodiesel combustion, *Fuel*. 109  
724 (2013) 248–255. doi:10.1016/j.fuel.2012.12.019.
- 725 [47] G. Vellguth, Performance of vegetable oils and their monoesters as fuels for diesel engines, *SAE Trans*.  
726 92 (1983) 1098–1107. doi:www.jstor.org/stable/44647674.
- 727 [48] G.M. Tashtoush, M.I. Al Widyhan, M.M. Al Jarrah, Experimental study on evaluation and optimization  
728 of conversion of waste animal fat into biodiesel, *Energy Convers. Manag.* 45 (2004) 2697–2711.  
729 <https://doi.org/10.1016/j.enconman.2003.12.009>.
- 730 [49] K. Anand, R.P. Sharma, P.S. Mehta, Experimental investigations on combustion, performance and  
731 emissions characteristics of neat karanja biodiesel and its methanol blend in a diesel engine, *Biomass  
732 and Bioenergy*. 35 (2011) 533–541. <https://doi.org/10.1016/j.biombioe.2010.10.005>.
- 733 [50] L. Li, J. Wang, Z. Wang, J. Xiao, Combustion and emission characteristics of diesel engine fueled with  
734 diesel/biodiesel/pentanol fuel blends, *Fuel*. 156 (2015) 211–218.  
735 <https://doi.org/10.1016/j.fuel.2015.04.048>.
- 736 [51] H.K. Imdadul, H.H. Masjuki, M.A. Kalam, N.W.M. Zulkifli, M. Kamruzzaman, M.M. Shahin, M.M.  
737 Rashed, Evaluation of oxygenated n-butanol-biodiesel blends along with ethyl hexyl nitrate as cetane  
738 improver on diesel engine attributes, *J. Clean. Prod.* 141 (2017) 928–939.  
739 <https://doi.org/10.1016/j.jclepro.2016.09.140>.
- 740 [52] P. Baskar, A. Senthilkumar, Effects of oxygen enriched combustion on pollution and performance  
741 characteristics of a diesel engine, *Eng. Sci. Technol. an Int. J.* 19 (2016) 438–443.  
742 doi:10.1016/j.jestch.2015.08.011.
- 743 [53] E.& I.S. Department for Business, Statistical data set weekly road fuel prices (CSV), Wkly. road fuel  
744 Prices. (2017).  
745 [https://www.gov.uk/government/uploads/system/uploads/attachment\\_data/file/624619/CSV.csv/preview](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/624619/CSV.csv/preview)  
746 (accessed July 4, 2017).