

A monolithically printed filtering waveguide aperture antenna

Mahmud, Rashad H.; Jarjees, Raad S.; Yu, Yang; Nugoolcharoenlap, Ekasit; Skaik, Talal; Attallah, Moataz M.; Wang, Yi

DOI:

[10.1109/LAWP.2023.3235275](https://doi.org/10.1109/LAWP.2023.3235275)

License:

Other (please specify with Rights Statement)

Document Version

Peer reviewed version

Citation for published version (Harvard):

Mahmud, RH, Jarjees, RS, Yu, Y, Nugoolcharoenlap, E, Skaik, T, Attallah, MM & Wang, Y 2023, 'A monolithically printed filtering waveguide aperture antenna', *IEEE Antennas and Wireless Propagation Letters*, pp. 1-5. <https://doi.org/10.1109/LAWP.2023.3235275>

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

R. H. Mahmud et al., "A Monolithically Printed Filtering Waveguide Aperture Antenna," in *IEEE Antennas and Wireless Propagation Letters*, doi: 10.1109/LAWP.2023.3235275.

© 2023 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

A Monolithically Printed Filtering Waveguide Aperture Antenna

Rashad H. Mahmud, Raad S. Jarjees, Yang Yu, E Nugoolcharoenlap, Talal Skaik, Moataz M. Attallah, and Yi Wang,
Senior Member, IEEE

Abstract—This letter presents the design of a 3rd order filtering waveguide aperture antenna based on coupled cavity resonators. Three offset-coupled rectangular waveguide cavities are employed in the design realizing two nested loaded-stubs without costing extra structure and size. The loaded-stubs introduce two controllable transmission zeroes and enhance the out-of-band realized gain selectivity. To validate the predicted results, a prototype operating at the X-band frequencies has been fabricated monolithically using the 3-D selective laser melting printing technique. The measured results are in very good agreement with the simulated results, showing a flat gain response of 7.0 ± 0.2 dBi from 9.5-10.5 GHz with very good out-of-band selectivity. The fractional bandwidth is about 10% at 10 GHz when $S_{11} = -20$ dB. Compared to the previously designed filtering antennas, the proposed design has the advantages of stronger out-of-band gain selectivity and low profile.

Index Terms— Aperture antennas, cavity resonators, coupling matrix, filtering antennas, 3-D printing, selective laser melting, transmission zeros, waveguide.

I. INTRODUCTION

FILTERING antennas have received significant attention of researchers due to combining the radiation characteristics of an antenna and frequency selectivity of a Bandpass filter (BPF) all in a single component. They reduce the front-ends size of a wireless communication system, and eliminate the transition losses caused due to the matching circuits [1, 2]. The filter synthesis technique, which allows the last coupled-resonator to radiate in addition to its filtering functionality role, has been widely used in the design of filtering antennas [3-6]. Strengthening the out-of-band realized gain selectivity and enhancing the bandwidth without costing the filtering antenna an extra circuit or structure are desirable for many wireless applications.

In [7], two resonant modes excited in the resonator was to widen the bandwidth of the filtering slotline antenna. Four slots inserted into the patches of the magneto-electric dipole antenna were not only to enhance the out-of-band realized gain selectivity, but also to enlarge the impedance bandwidth [8]. The defected ground structure in the Fan-shaped patch has improved the frequency selectivity and the bandwidth to some extent [9]. A unique cross-coupling scheme employed in the cavity of the slot antenna was mainly to increase the selectivity [10]. A complementary split ring etched in a 3-D substrate integrated waveguide (SIW) filtering antenna has achieved a significant bandwidth enhancement [11]. Similarly, a double-slot coupling structure etched in the SIW slot antenna was to merge the three resonance modes and then enlarge the bandwidth [12].

This work was supported by the U.K. Engineering and Physical Science Research Council under Contract EP/S013113/1.

R. H. Mahmud was with the School of Electronics, Electrical and Systems Engineering, University of Birmingham, Birmingham B15 2TT, U.K. He is now with the Physics Department, at Salahaddin University-Erbil, Kurdistan Region, Iraq (e-mail: rhm11286@yahoo.co.uk).

Raad S. Jarjees is with Physics department, University of Zakho, Iraq. (e-mail: raad.jarjees@staff.uoz.edu.krd)

E Nugoolcharoenlap is with the department of Telecommunication Engineering, Faculty of Engineering, Rajamangala University of Technology Rattanakosin, Thailand. (e-mail: ekasit.nug@rmutr.ac.th)

Yang Yu is with Key Laboratory of Microwave Remote Sensing, National Space Science Center, Chinese Academy of Sciences, Beijing, 100190, China. (e-mail: issacyu@live.cn)

Moataz M. Attallah is with the School of Metallurgy and Materials, University of Birmingham, Birmingham B15 2TT, U.K. (e-mail: m.m.attallah@bham.ac.uk).

Talal Skaik, and Y. Wang, are with the School of Electrical, Electronic and System Engineering, University of Birmingham, Birmingham B15 2TT, U.K. (e-mails: t.f.skaik@bham.ac.uk; y.wang.1@bham.ac.uk).

In [13], two resonance windows were employed in the cavity-backed filtering slot antenna to excite three modes and enlarge the bandwidth up to 24%. However, it was at the expense of the frequency selectivity. In [14], a T-shaped resonator has introduced two additional realized gain TZs to the dual-band microstrip antenna. However, the bandwidths were extremely narrow, and the realized gains were not stable within the passbands. In [15], although the three-line coupling scheme in the fed-port of the Leaf-shaped filtering antenna has brought TZs near the passband edges, the peak gain value is 4.02 dBi which may not be sufficient. Similarly, in [16], a dual mode SIW cavity has strengthened the frequency selectivity of the filtering slot antenna. However, its bandwidth does not exceed 4.1%, and the peak gain value is 5.38 dBi.

More recently, attentions are paid to the design of filtering antennas based on 3-D high-quality (Q) cavity structures. Such structures inherently maintain stronger frequency selectivity and lower insertion losses. However, the performance sensitivity of filtering antennas to the fabrication tolerance and fabrication cost remains as two significant challenges. In [17-19], the 3-D printing techniques have adapted for the design of narrow bandwidth filtering antennas. It should be mentioned that the 3-D printing technique has numerous advantages over conventional techniques such as making the whole filtering antenna device out of a single piece. This avoids the post processing assembly issue, and eliminates losses due to the electromagnetic leakage.

In this letter, a 3rd order filtering waveguide aperture antenna based on the coupling matrix approach is designed and fabricated using the 3-D selective laser melting (SLM) printing technique. Two nested loaded-stubs are realized

inside the proposed filtering antenna without increasing the size and complexity. Also, they generate two controllable TZs, and hence increase the out-of-band realized gain selectivity.

II. COUPLING MATRIX, TOPOLOGY, AND PHYSICAL STRUCTURE OF FILTERING ANTENNA

The general coupling matrix approach represents the element of a BPF and/or a filtering antenna in the form of an $N \times N$ coupling matrix [2, 20]. N is order of the filter and/or the filtering antenna. The main advantage of the approach is to create diverse topologies for the design of a filtering antenna. A novel topology and the equivalent $N \times N$ coupling matrix for the proposed filtering antenna are given below.

A. Topology and $N \times N$ Coupling Matrix

Fig. 1 shows the topology proposed for the 3rd order filtering antenna. Each black node represents a non-radiating cavity resonator, the green nodes represent the nested loaded-stubs, and the grey node represents a resonant-radiator formed of a resonator with a radiating aperture. The specifications are chosen to have a passband fractional bandwidth (FBW) of 10% when the reflection coefficient $S_{11} = -20$ dB at the center frequency $f_0 = 10$ GHz. Using these specifications, the normalized $N \times N$ coupling matrix $[m]$ can be obtained, using the general all-resonator coupling matrix synthesis technique given in [21], as follows:

$$[m] = \begin{bmatrix} 1 & 2 & 3 \\ -0.0070 & 0.09954 & -0.1440 \\ 0.09954 & 0.1465 & 0.12996 \\ -0.1440 & 0.12996 & -0.0803 \end{bmatrix} \quad (1)$$

The theoretical frequency response can be calculated using the above $[m]$ matrix. The physical design parameters of the filtering antenna can be extracted from the above $[m]$ matrix using the relations in [20], which are: $M_{12} = 0.0099$, $M_{23} = 0.01299$, $Q_{ex} = Q_r = 8.516$.

B. Physical Structure

Fig. 2 shows the physical layout of the filtering antenna which is configured from three offset-coupled TE_{101} mode rectangular waveguide cavity resonators. There is a direct coupling between the input port and resonator 1 via the iris having a width of (d_0). The resonators 1 and 2 are coupled from the sides via the iris (dk_{12}). Finally, resonators 2 and 3 are coupled in series directly by the iris (d_r). Two nested loaded-stubs are realized in each of the resonator 1 and 2 due to the offset coupling structures as explained here. In each of the resonator 1 and 2, there are two paths for the signal to pass. The main path is indicated by the yellow arrow, and a secondary path indicated by red arrows. The secondary path in resonator 1 causes a 180° phase shift for the signal and thus a transmission zero is created due to the interference. This happens at the frequency at which the stub length (Z_2) is 90° long. Similarly, another TZ is generated due to the secondary path in resonator 2 and it takes place at a frequency at which the stub length (Z_1) is 90° long.

A great feature of the proposed waveguide cavity configuration with offset-coupling scheme is that it provides quasi-elliptic gain response with improved out-of-band selectivity. It is found the dimensions (Z_1, Z_2) can control the frequency positions of the TZs. This will be investigated in the section II-C. The design parameters obtained from the $[m]$ matrix given in section II-A can be interpreted to obtain the initial physical dimensions of the filtering antenna (d_0, dk_{12}, d_r , and l_a), using the technique presented in [2]. These dimensions are optimized later by CST simulator [22], in order to meet the calculated response, as given in the caption of Fig. 2.

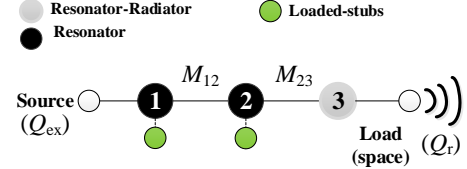


Fig. 1. Topology of the proposed 3rd order filtering antenna.

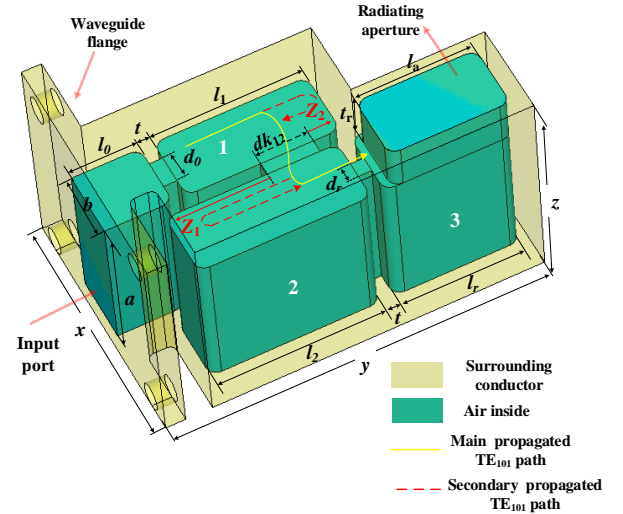


Fig. 2. Layout of the proposed filtering antenna. Dimensions in mm are: $a = 22.86$, $b = 10.16$, $t = 2$, $t_r = 9$, $l_0 = 10.16$, $d_0 = 4.5$, $dk_{12} = 10.6$, $d_r = 1.86$, $l_1 = 24.10$, $l_2 = 25.9$, $l_r = 19.7$, $l_a = 19.6$, $Z_1 = 11.4$, $Z_2 = 2.8$. The whole design dimensions excluding the embedded flange are: $x = 29.34$, $y = 62.5$, $z = 33.86$.

C. Simulated Results

The simulated and calculated results of the filtering antenna are shown in Fig. 3. A good agreement is observed with the ones calculated from the coupling matrix. Two TZs can be depicted on both sides of the simulated realized gain and total efficiency responses. It should be mentioned that both the simulated realized gain and total efficiency responses at the lower transition are poorer than the upper transition. This could be due to the capacitive irises used to couple the resonators which they resonate near the start band, and hence degrading the attenuation [23]. Also, the coupling iris (dk_{12}) value is relatively large, which may support different modes to propagate around the start band frequencies. The realized gain is extremely stable, having only 0.2 dBi fluctuations from 9.5 to 10.5 GHz. The peak gain is 7.1 dBi at 10.4 GHz. The total

efficiency including the conductor loss is more than 95% over the passband. The FBW is 10% when $S_{11} = -20$ dB at $f_0 = 10$ GHz, and the 3-dB gain bandwidth is more than 14.5%.

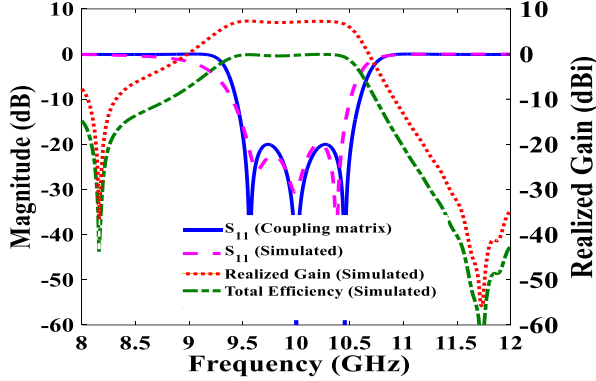


Fig. 3. Simulated and calculated response of the proposed filtering antenna.

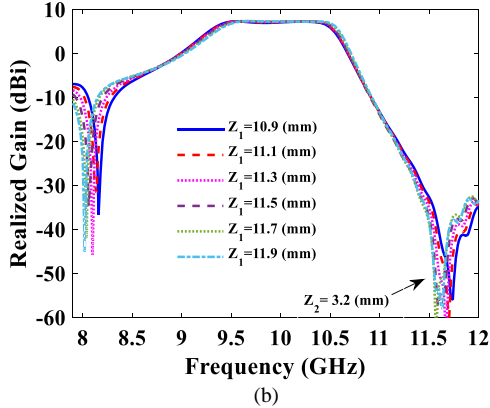
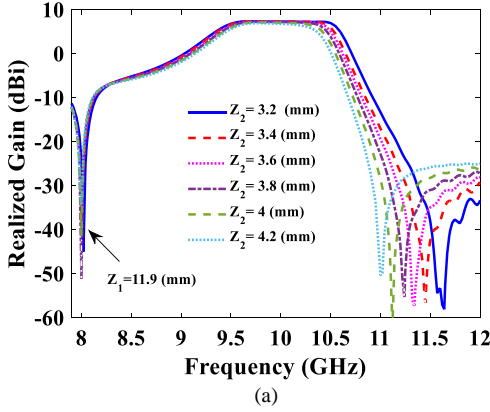


Fig. 4. Simulated realized gain response under the influence of (a) changing Z_1 , and (b) Z_2 dimensions.

The two TZs, TZ_1 at the lower transition and TZ_2 at the upper transition, can be adjusted by changing the dimensions Z_1 and Z_2 as can be observed in Fig. 4. With Z_1 fixed at 11.9 mm and changing the Z_2 value, TZ_2 can be adjusted, while TZ_1 remains unchanged as shown in Fig. 4 (a). Similarly, with Z_2 fixed at 3.2 mm and changing Z_1 value, TZ_1 can slightly be adjusted with negligible influence on the TZ_2 position. To exhibit the advantages of the proposed filtering antenna over our previous related work [24, 25], which is based on an inline

3rd order topology structure as shown in the inset of Fig. 5, a comparison is made. It can be observed that both filtering antennas have almost the same gain values within the passband. However, the proposed design has stronger out-of-band selectivity and a smaller total volume.

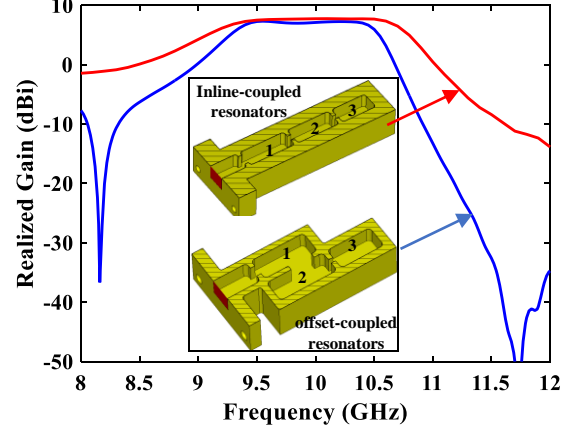


Fig. 5. The proposed and previous inline filtering antennas realized gain responses with their physical layouts.

III. FABRICATION AND MEASUREMENT

The proposed filtering antenna has been fabricated of stainless-steel using SLM process [26], as shown in Fig. 6. It was printed monolithically using SLM500 HL printer with a tilt angle of 45° to avoid overhanging structures. It is worth pointing out that this fabrication technique allows the whole design to be made from a single piece. This eliminates contact and misalignment losses.

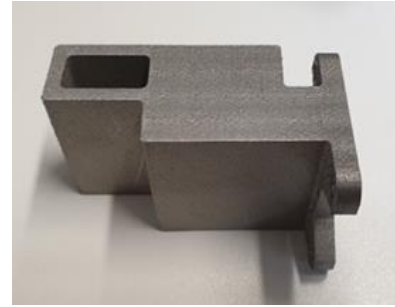


Fig. 6. Photograph of the fabricated filtering antenna.

The performance of the filtering antenna has been measured in an anechoic chamber room. The measured S_{11} and realized gain responses are compared with their simulation responses in Fig. 7. They are in very good agreement with each other. The measured S_{11} is below -18 dB over the passband, having a FBW of about 10%. The measured realized gain is flat over the passband, and is equal to 7.0 GHz at $f_0 = 10$ GHz. The two TZs are clearly identifiable at the start and stop bands. The inconsistency appeared round 8.5 GHz might be due to the fabrication tolerance of the 3-D printing technique. The radiation patterns for both the E- and H- planes are measured

at 9.5, 10, and 10.5 GHz, as shown in Fig. 8. They agree well with the simulations. It is important to address that the inconsistency in the backside lobes is due to the waveguide adaptor, which is attached to the device during the measurement, is not counted during the simulation.

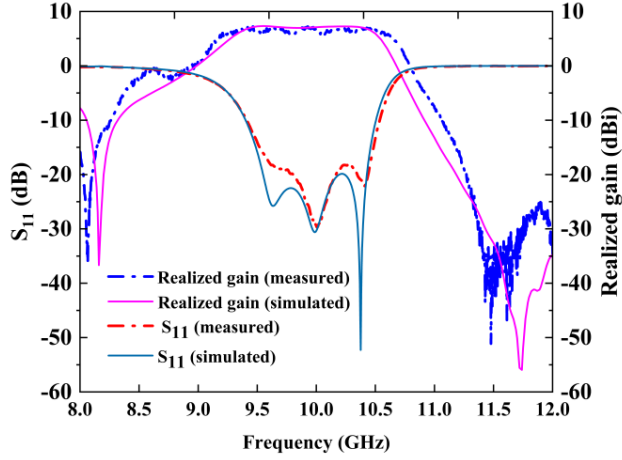


Fig. 7. Simulated and measured response of the filtering antenna.

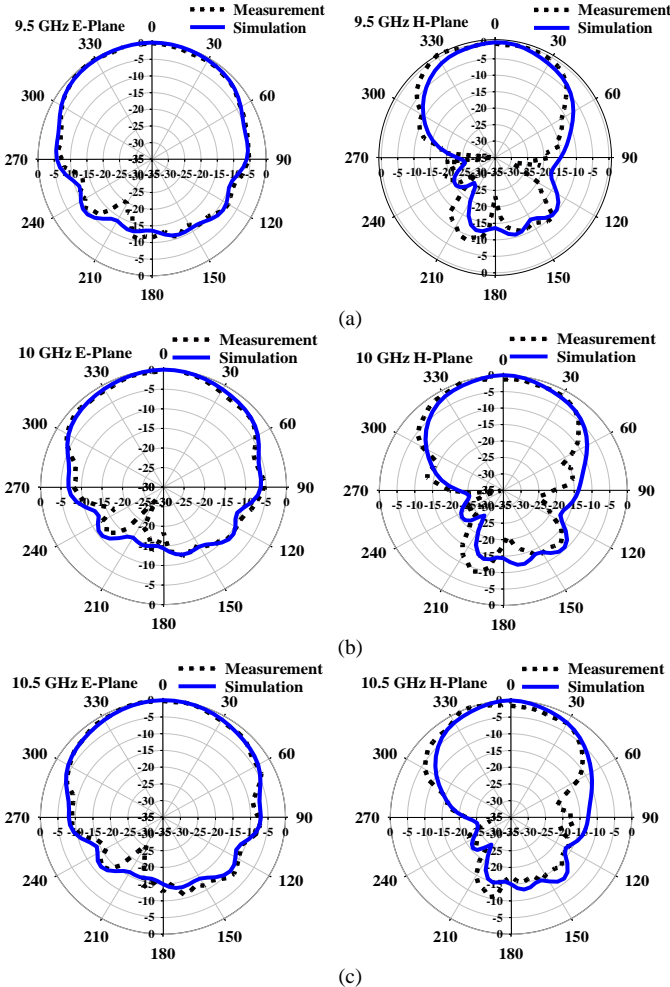


Fig. 8. Simulated and measured radiation patterns for both E- and H-planes at 9.5, 10, and 10.5 GHz.

The physical and electrical properties of the proposed filtering antenna design are compared with other related designs cited herein, as shown in Table I. The design presented in [13] has a larger bandwidth, and approximately the same gain as ours. However, there are no TZs around the passband edges and the selectivity is very poor. Also, the realized gain in [18] is greater than our design. This is due to utilizing more radiating apertures than ours. But, its bandwidth is narrow and no TZs existed. Comparing to the others, our design has a better out-of-band selectivity, higher gain, and lower profile.

TABLE I
FILTERING WAVEGUIDE ANTENNAS COMPARISONS

Refs.	f_0 (GHz)	Volume (λ_0^3)*	FBW (%) at $S_{11} = -10$ dB	peak gain (dBi) no. of radiating element	TZs
[1]	8.1	0.42*0.26*0.87	3.7	4.5 (one)	No
[3]	2.5	0.45*0.23*1.11	15	4.7 (one)	No
[5]	6.0	NA	8.4	6.3 (one)	Yes
[11]	2.95	0.62*0.62*0.03	6.3	6.7 (one)	No
[13]	3.03	0.97*0.89*1.48	24	7.3 (one)	No
[18]	34	1.48*3.68*3.78	2.94	12.5 (four)	No
[19]	4.85	NA	8.33	2.6 (one)	No
	4.6	NA	7.61	2.6 (one)	No
	4.75	NA	7.42	5.5 (one)	No
This work	10	0.97*2.08*1.12	11.1	7.1 (one)	Yes

* λ_0 is centered free space wavelength

IV. CONCLUSIONS

A high gain and wide bandwidth filtering antenna based on the coupling matrix approach was presented. Two controllable TZs were obtained due to the two loaded-stubs in which they were realized without costing extra circuit size or structure. The design was fabricated of stainless-steel using selective laser melting process. The measurements conducted for the performance of the filtering antenna were in very good agreement with the simulations. Furthermore, the design approach can be developed further and applied to filtering antenna arrays when appropriate topologies for filtering antennas are found.

ACKNOWLEDGMENT

The authors would like to thank the EDT research group at the University of Birmingham, UK for fabricating and measuring the device.

REFERENCES

- [1] D. Singhal and K. Dhvaj, "Dielectric Resonator-Based Evanescent-Mode Waveguide Filtering Antenna," *IEEE Antennas and Wireless Propagation Letters*, 2022.
- [2] R. H. Mahmud and M. J. Lancaster, "High-gain and wide-bandwidth filtering planar antenna array-based solely on resonators," *IEEE Transactions on Antennas and Propagation*, vol. 65, pp. 2367-2375, 2017.

- [3] P. Ludlow, V. Fusco, G. Goussetis, and D. E. Zelenchuk, "Applying band-pass filter techniques to the design of small-aperture evanescent-mode waveguide antennas," *IEEE transactions on antennas and propagation*, vol. 61, pp. 134-142, 2012.
- [4] F.-C. Chen, J.-F. Chen, Q.-X. Chu, and M. J. Lancaster, "X-band waveguide filtering antenna array with nonuniform feed structure," *IEEE Transactions on Microwave Theory and Techniques*, vol. 65, pp. 4843-4850, 2017.
- [5] J. Rao, K. Nai, P. Vaitukaitis, Y. Li, and J. Hong, "Compact 3-D Metal Printed Filtering Antenna," *IEEE Antennas and Wireless Propagation Letters*, vol. 21, pp. 386-390, 2021.
- [6] K.-R. Xiang, F.-C. Chen, and Q.-X. Chu, "High Selectivity and High Gain X-Band Waveguide Filtering Antenna Based on Triple-Mode Resonator," *IEEE Transactions on Antennas and Propagation*, vol. 69, pp. 6953-6958, 2021.
- [7] H.-T. Hu, F.-C. Chen, and Q.-X. Chu, "Novel broadband filtering slotline antennas excited by multimode resonators," *IEEE Antennas and Wireless Propagation Letters*, vol. 16, pp. 489-492, 2016.
- [8] S. J. Yang, Y. M. Pan, Y. Zhang, Y. Gao, and X. Y. Zhang, "Low-profile dual-polarized filtering magneto-electric dipole antenna for 5G applications," *IEEE Transactions on Antennas and Propagation*, vol. 67, pp. 6235-6243, 2019.
- [9] X. Chen, F. Zhao, L. Yan, and W. Zhang, "A compact filtering antenna with flat gain response within the passband," *IEEE Antennas and Wireless Propagation Letters*, vol. 12, pp. 857-860, 2013.
- [10] H. Chu, C. Jin, J.-X. Chen, and Y.-X. Guo, "A 3-D millimeter-wave filtering antenna with high selectivity and low cross-polarization," *IEEE Transactions on Antennas and Propagation*, vol. 63, pp. 2375-2380, 2015.
- [11] K.-Z. Hu, M.-C. Tang, M. Li, and R. W. Ziolkowski, "Compact, low-profile, bandwidth-enhanced substrate integrated waveguide filtenna," *IEEE Antennas and Wireless Propagation Letters*, vol. 17, pp. 1552-1556, 2018.
- [12] Y. Zhang, X. Y. Zhang, and Q. H. Liu, "A Dual-Layer Filtering SIW Slot Antenna Utilizing Double Slot Coupling Scheme," *IEEE Antennas and Wireless Propagation Letters*, vol. 20, pp. 1073-1077, 2021.
- [13] Y.-M. Wu, S.-W. Wong, H. Wong, and F.-C. Chen, "A design of bandwidth-enhanced cavity-backed slot filtenna using resonance windows," *IEEE Transactions on Antennas and Propagation*, vol. 67, pp. 1926-1930, 2018.
- [14] K. Dhawaj, L. J. Jiang, and T. Itoh, "Dual-band filtering antenna with novel transmission zero characteristics," *IEEE Antennas and Wireless Propagation Letters*, vol. 17, pp. 2469-2473, 2018.
- [15] J.-K. Xiao and X.-Q. Liu, "A Self-packaged Suspended Coplanar Waveguide Leaf-shaped Wideband Filtenna," *IEEE Antennas and Wireless Propagation Letters*, 2022.
- [16] B. C. Guo, K. Z. Hu, D. Yan, S. Y. Pan, M. C. Tang, and P. Wang, "Design of compact dual-band substrate integrated waveguide filtenna," *Microwave and Optical Technology Letters*.
- [17] Y. Yu, S. Wang, W. Ge, F. Zhang, G. Zhang, Y. Li, *et al.*, "Fully integrated design of a probe-fed open-ended waveguide filtering antenna using 3-D printing technology," *International Journal of RF and Microwave Computer-Aided Engineering*, vol. 31, p. e22680, 2021.
- [18] X. He, Y. Zhang, M. Du, and J. Xu, "Lightweight and compact high-gain filtering aperture antenna fabricated by three-dimensional printing technology," *IEEE Antennas and Wireless Propagation Letters*, vol. 17, pp. 1141-1144, 2018.
- [19] K. Zhao and D. Psychogiou, "Monolithically Integrated Coaxial Resonator-Based Filtennas Using SLA 3D Printing," *IEEE Antennas and Wireless Propagation Letters*, 2022.
- [20] J.-S. G. Hong and M. J. Lancaster, *Microstrip filters for RF/microwave applications*: John Wiley & Sons, 2004.
- [21] Y. Yu, B. Liu, Y. Wang, M. J. Lancaster, and Q. S. Cheng, "A general coupling matrix synthesis method for all-resonator diplexers and multiplexers," *IEEE Transactions on Microwave Theory and Techniques*, vol. 68, pp. 987-999, 2020.
- [22] C. M. Studio, "CST Studio Suite 2011," *Comput. Simul. Technol. AG*, 2014.
- [23] X. Shang, Y. Wang, G. Nicholson, and M. Lancaster, "Design of multiple-passband filters using coupling matrix optimisation," *IET microwaves, antennas & propagation*, vol. 6, pp. 24-30, 2012.
- [24] R. H. Mahmud, "Synthesis of waveguide antenna arrays using the coupling matrix approach," University of Birmingham, 2016.
- [25] R. H. Mahmud, Xiaobang Shang, Yi Wang, Talal Skaik, and Michael J. Lancaster "Filtering Waveguide Aperture Antennas Based on the All-Resonator Structures," *IET*, submitted.
- [26] I. Gibson, D. W. Rosen, B. Stucker, M. Khorasani, D. Rosen, B. Stucker, *et al.*, *Additive manufacturing technologies* vol. 17. Boston, USA: Springer, 2010.