UNIVERSITY^{OF} BIRMINGHAM University of Birmingham Research at Birmingham

Vehicle non-exhaust emissions - revealing the pathways from source to environmental exposure

Wu, Tiantong; Lo, Kelly; Stafford, Jason

DOI: 10.1016/j.envpol.2020.115654

License: Creative Commons: Attribution-NonCommercial-NoDerivs (CC BY-NC-ND)

Document Version Peer reviewed version

Citation for published version (Harvard):

Wu, T, Lo, K & Stafford, J 2021, 'Vehicle non-exhaust emissions - revealing the pathways from source to environmental exposure', *Environmental Pollution*, vol. 268, 115654. https://doi.org/10.1016/j.envpol.2020.115654

Link to publication on Research at Birmingham portal

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

•Users may freely distribute the URL that is used to identify this publication.

•Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.

•User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?) •Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

1 Title

2 Vehicle non-exhaust emissions – Revealing the pathways from source to environmental exposure 3

4 Authors

5 Tiantong Wu,¹ Kelly Lo,¹ Jason Stafford.^{1,*}

7 Affiliations

⁸ ¹ School of Engineering, College of Engineering & Physical Sciences, University of Birmingham, B15

- 9 2TT, United Kingdom.
- 10 * j.stafford@bham.ac.uk
- 11

6

12 Abstract

Brakes, tyres and road deposits have become important contributors to the overall particle emissions of 13 vehicles globally, with constituents in these wear particles considered to be harmful to human health 14 (PM₁₀ and PM_{2.5}). Previous research has documented mass/size distributions, physical and chemical 15 characteristics, emission factors and long-term implications and environmental occurrences. The 16 complex path these pollutants take from their origins to the environment, however, is not fully 17 understood. This is partly owing to the breadth of spatio-temporal scales involved in the advection-18 diffusion processes (nanometers to meters, microseconds to minutes). These short timescale particle 19 transport mechanisms impact human exposure, such as pedestrians and cyclists, and initiate the long-20 term interaction of these pollutants with other environmental compartments. Here, we present an analysis 21 for urban driving conditions to highlight the opportunities to reveal these complex pathways and 22 formulate opinions that aim to stimulate future enquiry. We describe important vehicular areas and 23 exposure scenarios where efforts should focus. Future interdisciplinary research into these particle 24 transport mechanisms must be prioritised as it can provide the foundation for developing urgently needed 25 pollution control strategies, transport infrastructure layouts and transport policies that mitigate, or 26 possibly eliminate pollution exposure risks. 27

28

30

29 Keywords: Non-exhaust; Brake wear; Tyre wear; Emission exposure; Vehicle emissions.

31 **1. Introduction**

32 Road transport emissions are regularly categorized into two subgroups: exhaust and non-exhaust. Nonexhaust emission sources are unregulated and typically consist of brake, type and road dust [1, 2]. 33 Advances in the abatement of regulated exhaust emissions have led to these sources quickly becoming a 34 leading contributor to particulate concentrations. Tunnel measurements in the UK and China indicate 35 non-exhaust emissions contribute 50-75% of PM₁₀ and 15-40% of PM_{2.5}, respectively [1, 3] These fine 36 and ultrafine particles have physicochemical properties that have been shown to adversely affect human 37 health from medical disorders to increased mortality [4, 5]. The outlook for non-exhaust emissions in the 38 UK, without any abatement, is predicted to be 94% of total PM₁₀ emissions and 90% of PM_{2.5} by 2030 39 [6]. This highlights both the importance and timeliness for developing technological solutions and 40 environmental policies to address what is a global challenge. 41

In order to improve our understanding of how non-exhaust emission sources pose human health risks, and develop mitigation strategies, there are two main scientific issues to consider. The first issue that has received most attention consists of measuring the physical characteristics [7, 8], chemical composition [9], emission factors [3] and overall contribution of non-exhaust PM to transport emissions [1]. The second issue is interdependent, involving the relationship between the pollution source (brakes, tyres and road), vehicle kinematics and dynamics, and the vehicle aerodynamics. Collectively, these areas influence the spatio-temporal emission distributions in the surrounding environment through variations in 49 driving conditions [2, 10] and particle transport mechanisms from source to the environment. The latter

is the focus of this short commentary as it has received much less attention in the literature.

51 Our analysis aims to illustrate the significant role that aerodynamics can play in defining the trajectory, composition and fate of micron and sub-micron particles to the environment. Key vehicular areas are 52 53 outlined which require urgent attention to quantify their contribution to the mass transport behaviour of non-exhaust pollutants. Furthermore, the multi-scale and multi-phase numerical techniques discussed are 54 useful tools to model transport of particle matter down to an individual particle level. This provides 55 information that is seldom practical to obtain with experiments in real-world testing conditions and can 56 distinguish and track particles from simultaneous sources (e.g. brakes, tyres and road) often difficult to 57 decouple in practice [7]. This is followed by a brief discussion on the opportunity for this research 58 59 direction to guide mitigation technology and support the development of evidence-based transport policy to ensure human exposure to vehicle emissions is minimised. 60

61 **2. Analysis**

Research on vehicle aerodynamics has been predominantly concerned with quantifying vehicle drag, and 62 cooling performances [11]. Drag produces a force that resists vehicle motion and is therefore directly 63 connected to fuel consumption. This relationship, combined with tighter governmental regulations on 64 fuel consumption and efficiency, has led the automotive industry to focus on developing aerodynamic 65 characteristics for a singular purpose - drag reduction. Wheels and tyres contribute approximately 25% 66 of the overall aerodynamic drag, produced directly by exposure to the outside air flow and indirectly by 67 the tyre wake interacting with the external body [12, 13]. Notably, these locations generate complex 68 unsteady flow separation, are in direct contact with the road, and are where brake and tyre emissions 69 originate. This suggests that vehicle air flows have a non-trivial role in dispersing particles from vehicle 70 sources (brake, tyre) and re-dispersing residual particles from the road surface. Indeed, previous research 71 has shown that 50-70% of brake wear debris become airborne, with the remainder depositing on vehicle 72 and road surfaces [7]. Investigating this dispersion process is central to studies on human exposure in 73 urban environments. For example, a recent investigation on indoor PM concentrations confirmed that 74 road proximity is a reasonable exposure metric often used in epidemiological studies [14]. 75


76 Physical testing is one approach. Mobile emission laboratories are capable of measuring particle size and concentration in transient driving cycles [15]. Recent measurement systems for on-road testing have also 77 incorporated sophisticated sampling systems to characterise non-exhaust particle emissions [16]. 78 Laboratory testing in controlled environments can assess the impact of important operating variables on 79 emissions including brake temperature [17]. Although these advancements reveal novel insights on 80 particle formation and emission factors under variable driving conditions, on-road systems are inherently 81 invasive and laboratory measurements provide less realistic conditions to examine the source-82 environment interface. Additionally, these state-of-art particle sampling methods acquire scalar 83 quantities (e.g. size and concentration) and are unable to reveal the history of the complex interaction 84 between the emission source, vehicle and environment. Uncovering these pollutant pathways is 85 challenging, with advection-diffusion particle transport processes occurring over multiple length- and 86 time-scales (nanometers to meters and microseconds to minutes – Figure 1). 87

Advanced multi-scale and multi-phase computational fluid dynamics techniques for modelling particleladen flows can provide deep insights to address this challenge. It can also support hypotheses derived from experimental observations of environmental pollution. These techniques are beginning to gain traction outside of scientific research due to computing advances. However, the primary use of these specialised simulation tools for the automotive industry is to study surface contamination as it affects water management and vehicle aesthetics [18]. We believe that there is an opportunity for the research community to use these techniques for interdisciplinary investigations that reveal the complex pathways

of non-exhaust emission sources to the environment and reduce human exposure. To demonstrate this, an 95 example of a simplified vehicle model of a small-sized car is considered in Figure 1. Using coupled 96 Euler-Lagrangian simulations, we recorded the paths taken by individual brake wear particles during a 97 short braking event at a vehicle speed of 30 mph and deceleration of 3 m/s², similar to urban driving 98 99 conditions. Unsteady flow fields were determined by obtaining numerical solutions of the Reynoldsaveraged Navier-Stokes equations and a realizable $k-\varepsilon$ approach for turbulence modelling. The motion of 100 brake wear particles was solved using a point-particle method based on the Maxey-Riley equation and 101 particle emission from each brake pad was based on emission rate data for urban driving [19, 20]. Four 102 different phases of wheel rotation, separated by 30 millisecond time intervals, show microscale particles 103 being ejected from source to environment after braking. Their motion and selectivity is highly sensitive 104 to aerodynamic effects, including brake disc ventilation, underbody, road surface and wheel/tyre 105 interactions with the environment. Larger diameter particles ($d_p > 10 \mu m$) first emerge from wheel 106 openings while the expulsion of the smaller airborne particles ($d_p \sim 1 \mu m$) is slightly delayed in the hub 107 region. These size-selective particle clouds are also ejected into the environment with potentially harmful 108 trajectories for human exposure. 109

An example of different exposure scenarios in urban environments is shown in Figure 2. These include 110 vehicle-person and vehicle-vehicle, or vehicle-passenger interactions that are not well understood at 111 present. Although it is not included in this graphic, enhanced pollution exposure can also extend to 112 indoor spaces in buildings that are located ~100 m from roads [14]. In order to quantify their significance 113 and implications on human health, a greater understanding of particle transport processes from non-114 exhaust sources is required. The key vehicular areas likely to have a dominant effect on these processes, 115 and which require investigation, are also highlighted. Future investigations should also include specific 116 details in areas such as type patterns, type loading and contact surfaces, wheel design and brake assembly. 117 In addition to their significance on wear particle emission rates [10, 17], these areas can also affect the 118 flow behaviour and aerodynamics of the vehicle [21]. The present analysis suggests these will also 119 influence the particle transport routes to the environment. 120

By revealing these particle transport processes, together with quantifying their environmental impact, 121 there is a follow-on opportunity to mitigate the associated health and environmental risks through both 122 technology and policy-based solutions. Understanding the pathway of airborne particle matter at the 123 vehicle-environment interface can provide rich information for developing particle capture and flow 124 control technologies for vehicles. These would complement existing research on reducing particle 125 formation mechanisms at source [22]. Similarly, the design of transport infrastructure, temporary layouts, 126 pedestrian routes and cycle lanes in urban areas would also benefit. Ideally, to ensure solutions are 127 globally accessible, research efforts should account for vehicle differences (e.g. make/model 128 independent), retrofit considerations for older vehicles, and affordability. Finally, determining the non-129 exhaust emission pathways from source to environmental exposure can make these pollutants 'visible' to 130 non-specialist audiences, producing highly visual scientific evidence to shift perceptions, raise 131 132 awareness, and influence decision makers involved in transport and environmental policies.

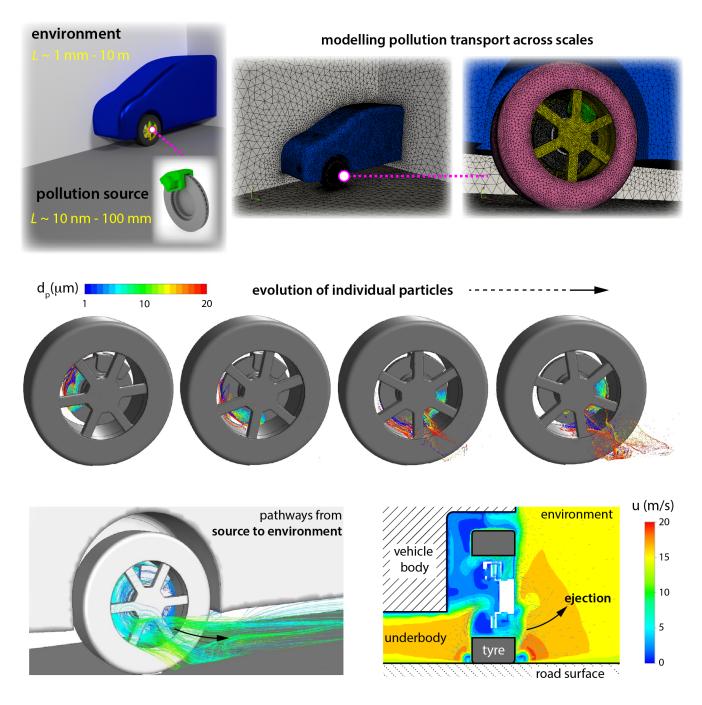

133

Figure 1: Brake wear particles are ejected during a braking event and follow a path from source to environment that is governed by aerodynamic interactions between the vehicle, road, wheel and brake assembly.

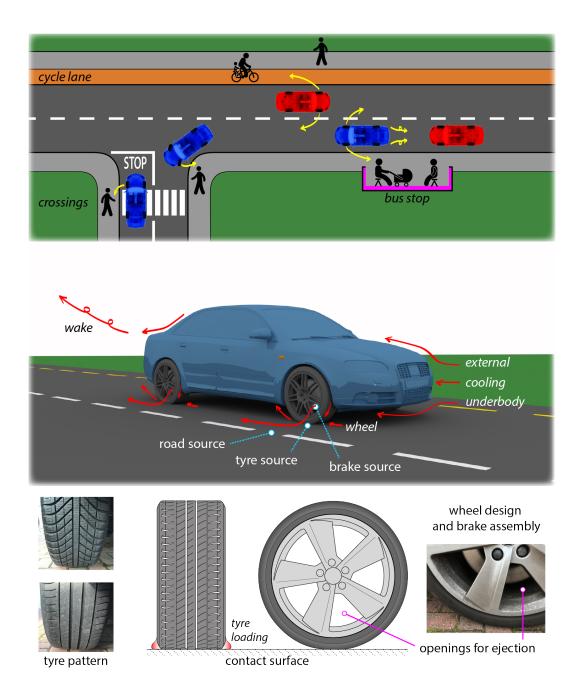




Figure 2: Exposure risk scenarios in urban environments (top) and key vehicular areas that influence pollution transport from brake, tyre and road sources to the wider environment (middle and bottom).

140 **Conclusions**

Non-exhaust emissions from vehicles are becoming an increasingly important contributor to the overall 141 levels of particulate matter from road transport. Although research over the past decade has advanced 142 scientific knowledge on particle formation, composition and environmental occurrences, the complex 143 pathways these emissions take from the source to the environment is, for the most part, unresolved. 144 These particle transport processes connect emission sources to human exposure and remain elusive due 145 to the challenges in accurately quantifying their fate using non-invasive, real-world experiments. In this 146 commentary, we discuss the key areas and opportunities to address this including the use of advanced 147 multi-scale and multi-phase simulations that can uncover a detailed understanding of the initial 148 interactions between vehicles and the environment. The routes and composition of particles released to 149 the environment are highly sensitive to vehicle aerodynamics. It is important, therefore, that these 150

- 151 particle transport mechanisms are studied and combined with interdisciplinary research collaborations.
- 152 This way, the connection and risk of non-exhaust sources to human health and the environment can be 153 thoroughly quantified and addressed.
- 154
- 155 **References**
- S. Lawrence, R. Sokhi, K. Ravindra, Quantification of vehicle fleet PM₁₀ particulate matter emission factors from exhaust and non-exhaust sources using tunnel measurement techniques. *Environmental Pollution* 210, 419–428 (2016).
- 2. F. Amato, M. Pandolfi, T. Moreno, M. Furger, J. Pey, A. Alastuey, N. Bukowiecki, A.S.H. Prevot, U.
 Baltensperger, X. Querol, Sources and variability of inhalable road dust particles in three
 European cities. *Atmospheric Environment* 45, 6777–6787 (2011).
- 3. J. Zhang, J. Peng, C. Song, C. Ma, Z. Men, J. Wu, L. Wu, T. Wang, Z. Zhang, S. Tao, S. Gao, P. K.
 Hopke, H. Mao, Vehicular non-exhaust particulate emissions in Chinese megacities: source profiles, real-world emission factors, and inventories. *Environmental Pollution* 266, 115268, 1–10 (2020).
- 4. A. Khan, O. Plana-Ripoll, S. Antonsen, J. Brandt, C. Geels, H. Landecker, P. F. Sullivan, C. B.
 Pedersen, A. Rzhetsky, Environmental pollution is associated with increased risk of psychiatric disorders in the US and Denmark. *PLOS Biology* 17(8), e3000353 (2019).
- 169 5. L.C. Chen, M. Lippmann, Effects of metals within ambient air particulate matter (PM) on human
 170 health. *Inhalation toxicology* 21(1), 1–31 (2009).
- Air Quality Expert Group, Non-exhaust emissions from road traffic, Report prepared for *Dept. Environment, Food and Rural Affairs (DEFRA), UK* (2019).
- 7. P. G. Sanders, N. Xu, T. M. Dalka, M. M. Maricq, Airborne brake wear debris: size distributions, composition, and a comparison of dynamometer and vehicle tests. *Environ. Sci. Technol.* 37(18), 4060–4069 (2003).
- 8. A. Iijima, K. Sato, K. Yano, H. Tago, M. Kato, H. Kimura, N. Furuta, Particle size and composition distribution analysis of automotive brake abrasion dusts for the evaluation of antimony sources of airborne particulate matter. *Atmospheric Environment* 41(23), 4908–4919 (2007).
- 9. J. Kukutschova, P. Moravec, V. Tomasek, V. Matejka, J. Smolik, J. Schwarz, J. Seidlerova, K.
 Safarova, P. Filip, On airborne nano/micro-sized wear particles released from low-metallic
 automotive brakes. *Environmental Pollution* 159(4), 998–1006 (2011).
- 10. M. Mathissen, V. Scheer, R. Vogt, T. Benter, Investigation on the potential generation of ultrafine
 particles from tire road interface. *Atmospheric Environment* 45, 6172–6179 (2011).
- 11. L. Sterken, S. Sebben, L. Lofdahl, Numerical implementation of detached-eddy simulation on a passenger vehicle and some experimental correlation. *J. Fluids Engineering* 138, 091105, 1–14 (2016).
- 12. T. Hobeika, S. Sebben, CFD investigation on wheel rotation modelling. J. Wind Engineering and Industrial Aerodynamics 174, 241–251 (2018).
- 13. S. Kurachi, H. Kawamata, K. Hirose, S. Suzuki, M. Oshima, Aerodynamic sensitivity analysis of tire shape factors. *SAE Tech. Paper*, DOI: https://doi.org/10.4271/2020-01-0669 (2020).
- 14. S. Huang, J. Lawrence, C. Kang, J. Li, M. Martins, P. Vokonas, D.R. Gold, J. Schwartz, B.A. Coull,
 P. Koutrakis, Road proximity influences indoor exposures to ambient fine particle mass and
 components. *Environmental Pollution* 243, 978–987 (2018).

- 15. H. Wihersaari, L. Pirjola, P. Karjalainen, E. Saukko, H. Kuuluvainen, K. Kulmala, J. Keskinen, T.
 Ronkko, Particulate emissions of a modern diesel passenger car under laboratory and real-world
 transient driving conditions. *Environmental Pollution* 265, 114948, 1–10 (2020).
- 16. F.H. Farwick zum Hagen, M. Mathissen, T. Grabiec, T. Hennicke, M. Rettig, J. Grochowicz, R.
 Vogt, T. Benter, On-road vehicle measurements of brake wear particle emissions. *Atmospheric Environment* 217, 116943 (2019).
- 17. F.H. Farwick zum Hagen, M. Mathissen, T. Grabiec, T. Hennicke, M. Rettig, J. Grochowicz, R.
 Vogt, T. Benter, Study of brake wear particle emissions: impact of braking and cruising
 conditions. *Environ. Sci. Technol.* 53, 5143–5150 (2019).
- 18. A.P Gaylard, K. Kirwin, D.A. Lockerby, Surface contamination of cars: a review. *Proc. IMechE Part D: J. Automobile Engineering* 231(9), 1160–1176 (2017).
- 19. J. G. M. Kuerten, Point-particle DNS and LES of particle-laden turbulent flow a state-of-the art review. *Flow Turbulence Combustion*. 97, 689–713 (2016).
- 207 20. H. Hagino, M. Oyama, S. Sasaki, Laboratory testing of airborne brake wear particle emissions using
 208 a dynamometer system under urban driving cycles. *Atmospheric Environment* 131, 269–278
 209 (2016).
- 21. T. Hobeika, S. Sebben, Tyre pattern features and their effects on passenger vehicle drag. *SAE Int. J. Passenger Cars Mechanical Systems* 11(5), 401–413 (2018).
- 212 22. G. Perricone, V. Matejka, M. Alemani, G. Valota, A. Bonfanti, A. Ciotti, U. Olofsson, A. Soderberg,
 213 J. Wahlstrom, O. Nosko, G. Straffelini, S. Gialanella, M. Ibrahim, A concept for reducing PM₁₀
 214 emissions for car brakes by 50%. *Wear* 396-397, 135–145 (2018).

216 Acknowledgments

215

- The authors acknowledge use of High Performance Computing facilities at the University of Birmingham (BlueBEAR). We are also grateful for the support from the Institute for Global Innovation
- 219 (IGI) within the IGI-IAS Clean Air Emerging Theme.